




RAZVOJ WEB APLIKACIJA I WEB DIZAJN LABORATORIJSKE VEŽBE

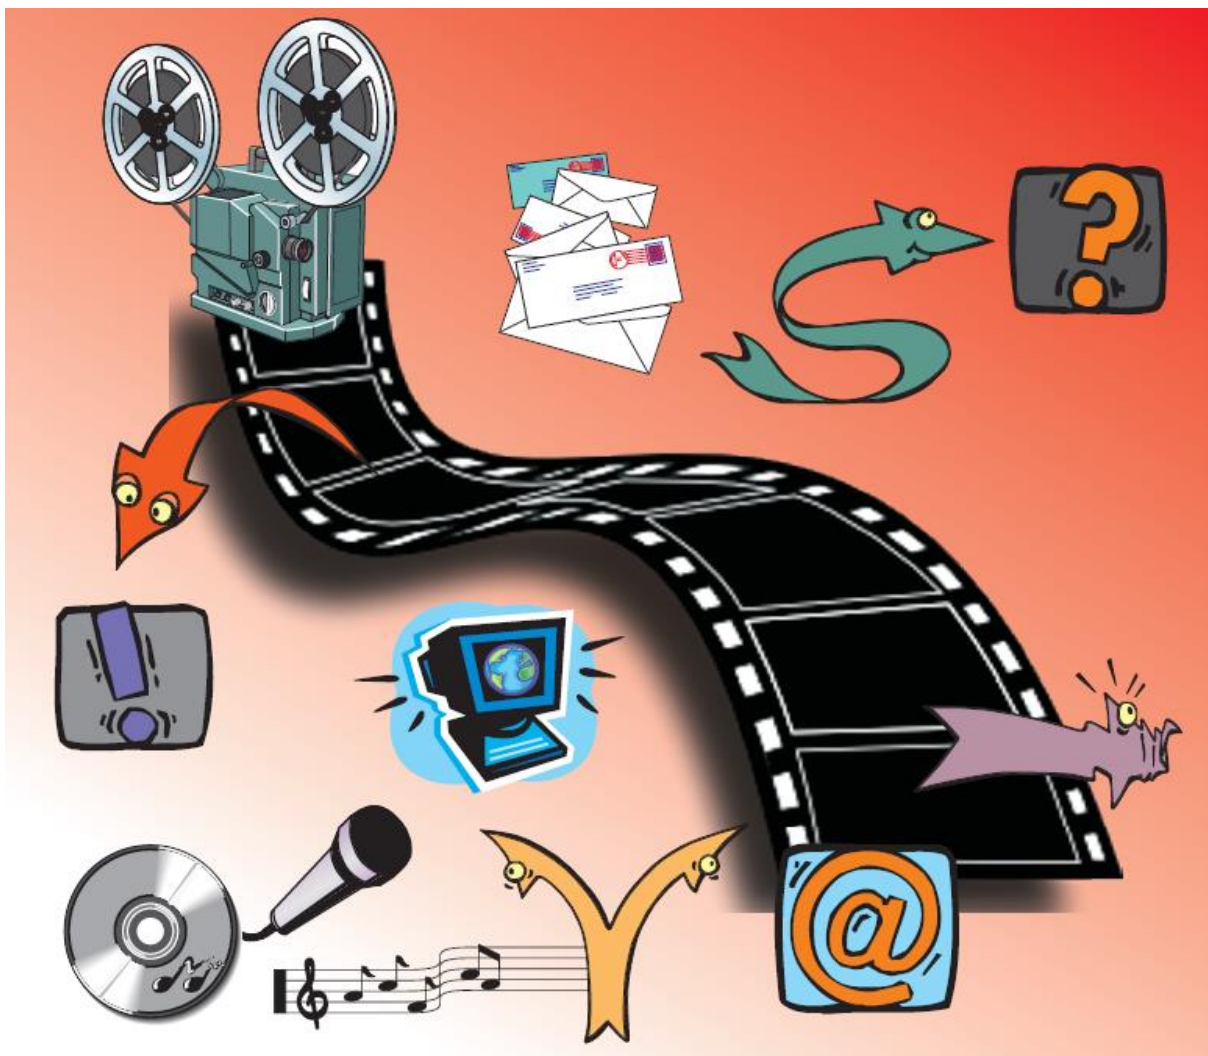

Profesor Borivoje Milošević

Beograd 2021.

VEŽBA 1:

HTML jezik Interneta

- **H**yper **T**ext **M**arkUp **L**anguage
- Univerzalni jezički format na Internetu
- WWW se zasniva na klijent server-modelu
- Jezik kojim se opisuje pristup WWW dokumentima je HTML.



50

Šta je HTML?

- HTML (Hyper Text Markup Language) je markup jezik za opisivanje veb dokumenata odnosno veb stranica
- Markup jezik se sastoji od seta markup tagova
- HTML dokumenta su opisana preko HTML tagova
- Svaki HTML tag opisuje različit sadržaj dokumenta
- HTML opisuje strukturu Web stranice
- HTML se sastoji od serije HTML elemenata koji kazuju browseru kako da prikaže sadržaj
- Labele HTML elemenata su deo sadržaja kao "this is a heading", "this is a paragraph", "this is a link "...
- HTML nije **Case Sensitive** jezik

51

HTML izgled elemenata

HTML ima nekoliko semantičkih elemenata koji definišu različite delove web stranice:

<code><header></code>	• <code><header></code> - Definiše zaglavlje za dokument ili odeljak
<code><nav></code>	• <code><nav></code> - Definiše skup navigacijskih veza
<code><section></code>	• <code><section></code> - Definiše odeljak u dokumentu
<code><article></code>	• <code><article></code> - Definiše nezavisan, samostalni sadržaj
<code><aside></code>	• <code><aside></code> - Određuje sadržaj strane iz konteksta (sidebar)
<code><footer></code>	• <code><footer></code> - Definiše futer za dokument ili odeljak
	• <code><details></code> - Definiše dodatne detalje koje korisnik na zahtev može otvoriti i zatvoriti
	• <code><summary></code> - Definiše zaglavlje za element <code><details></code>
	• Više o semantičkim elementima možete pročitati u našem poglavlju HTML semantika.

52

Primer HTML dokumenta:

Objašnjenje primera sa slike:

- `!DOCTYPE` deklaracija označava da je dokument HTML tipa
- Tekst između tagova `<html>` i `</html>` opisuje HTML dokument
- Tekst između tagova `<head>` i `</head>` obezbeđuje informacije o dokumentu
- Tekst između tagova `<title>` i `</title>` obezbeđuje naslov dokumenta
- Tekst između tagova `<body>` i `</body>` opisuje vidljiv sadržaj stranice
- Tekst između tagova `<h1>` i `</h1>` opisuje naslov
- Tekst između tagova `<p>` i `</p>` opisuje paragraf

```
<!DOCTYPE html>
<html>
<head>
<title>Naslov stranice</title>
</head>
<body>
<h1>Moj prvi naslov</h1>
<p>Moj prvi paragraf.</p>
</body>
</html>
```

HTML tagovi su ključne reči (imena tagova) u okviru uglastih zagrada:

`<ime taga>`sadržaj`</ime taga>`

HTML tagovi obično idu u parovima (npr. `<p>` i `</p>`)

• Prvi tag u paru je otvoreni ili početni tag, a drugi njegov zatvoreni ili završni tag

• Zatvoreni tag se piše kao otvoreni sa tim što se ispred njegovog imena stavlja kosa crta

Start tag	Element content	End tag
<code><h1></code>	My first heading	<code></h1></code>
<code><p></code>	My first paragraph.	<code></p></code>
<code>
</code>	none	none

53

HTML Struktura stranice

```
<html>
  <head>
    <title>Page title</title>
  </head>
  <body>
    <h1>This is a heading</h1>
    <p>This is a paragraph.</p>
    <p>This is another paragraph.</p>
  </body>
</html>
```

Primerba: Sadržaj unutar <body> sekcije (prostor označen belo) biće prikazivani u brovzeru. Sadržaj unutar elementa <title> biće prikazivani u brovzerovom naslovnom baru ili u tabu stranice.

54

Primer HTML


- Web stranice se mogu kreirati i modifikovati korišćenjem profesionalnih HTML editora. pages can be created and modified by using professional HTML editors.
- Medjutim, za učenje HTML_a preporučujemo jednostavne tekst editore kao Notepad (PC) ili TextEdit (Mac).
- Koristite sledeće korake da bi kreirali svoju prvu WEB stranu sa Notepad_om ili TextEdit_om.

94

Napišite prvi HTML fajl

- Napišite ili iskopirajte sledeći HTML kod u Notepad:

```
<!DOCTYPE html>
<html>
<head>
<title> Moja prva stranica</title>
</head>
<body>
<h1>Ovo je naslov</h1>
<p>Ovo je paragraf.</p>
</body>
</html>
```

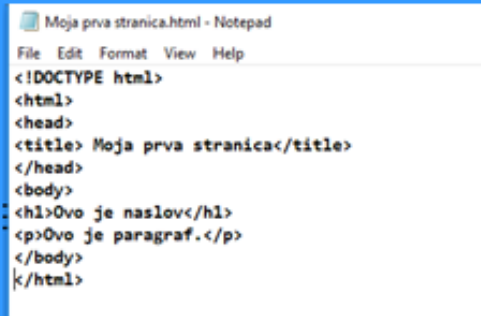


```
Moja prva stranica.html - Notepad
File Edit Format View Help
<!DOCTYPE html>
<html>
<head>
<title> Moja prva stranica</title>
</head>
<body>
<h1>Ovo je naslov</h1>
<p>Ovo je paragraf.</p>
</body>
</html>
```

95

Zapamtite HTML stranicu na izabranom direktorijumu

- Zapamtiti fajl na vašem računaru. Selektovati **File > Save as** u Notepad meniju.
- Označite fajl kao „**Moja prva stranica.htm (.html)** i setovati enkodiranje na **UTF-8** (kao prioriteno enkodovanje za HTML fajlove).

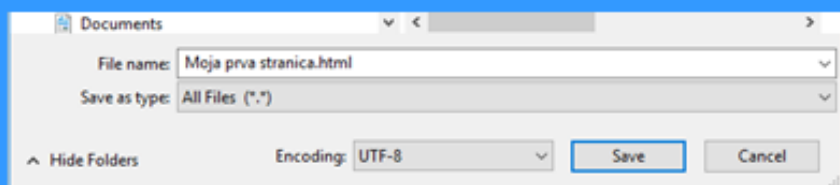


96

Rezultat

```
<!DOCTYPE html>
<html>
<head>
<title> Moja prva
stranica</title>
</head>
<body>
<h1>Ovo je naslov</h1>
<p>Ovo je paragraf.</p>
</body>
</html>
```

Izvršite HTML skriptu brovzeru koji koristite:
Otvoriti zapamćeni HTML fajl sa vašeg direktorijuma (dvostrukim klikom na fajl ili klik na desni taster miša sa izborom "Open with,... Bilo koji brovzer). U izabranom brovzeru dobijamo:

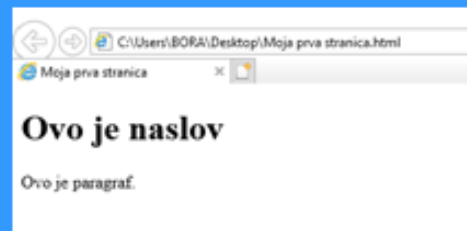

97

CSS boje i fontovi

```
<!DOCTYPE html>
<html>
<head>
<style>
h1{color: blue;
font-family: verdana;
font-size: 300%;}
p{color: red;
font-family: courier;
font-size: 160%;}
</style>
</head>
<body>
<h1>Ovo je heding</h1>
<p>Ovo je paragraf.</p>
</body>
</html>
```



Ovo je heding

Ovo je paragraf.



HTML elementi za formatiranje teksta

```
<!DOCTYPE html>
<html>
<head>
  <meta charset="UTF-8">
  <title>Primer 5</title>
  <style>
    p#p2 { font-size: 2em;}
    p#p3 { font-style: italic; }
    p#p4 { font-weight: bold; }
  </style>
</head>
<body>
<p id="p1">Ovo je veličina fonta veb pregledača </p>
<hr><p id="p2">Ovo je duplo veća veličina fonta veb pregledača
(font-size: 2em).</p>
<hr> <p id="p3">Ova slova su iskošena (font-style: italic).</p>
<hr> <p id="p4">Ova slova su podebljana (font-weight: bold).</p>
</body>
</html>
```

Ovo je veličina fonta veb pregledača

Ovo je duplo veća veličina fonta veb pregledača (font-size: 2em).

Ova slova su iskošena (font-style: italic).

Ova slova su podebljana (font-weight: bold).

Podešavanje ivica svojstvom border

```
<!DOCTYPE html>
<html>
<head>
  <title>Primer 12</title>
  <meta charset="UTF-8">
  <style type="text/css">
    p.full-border { border: 5px solid red; }
    p.left-border-only { border-left: solid 20px;}
  </style>
</head>
<body>
  <p class="full-border">Neki tekst.</p>
  <p class="left-border-only">Neki tekst.</p>
</body>
</html>
```

Neki tekst.

■ Neki tekst.

Svojstvo border-radius

```
<!DOCTYPE html>
<html>
<head>
  <title>Primer 13</title>
  <meta charset="UTF-8">
  <style type="text/css">
    #example1 {
      border: 2px solid red;
      padding: 10px;
      border-radius: 25px; }

    #example2 {
      border: 2px solid red;
      padding: 10px;
      border-radius: 50px 20px 50px 50px;}
  </style>
</head>
<body>
  <h2>border-radius: 25px:</h2>
  <div id="example1">
    <p>Svojstvo border-radius definiše zakrivljenje ćoškova elementa.</p>
  </div>
  <h2>border-radius: 50px 20px 50px 50px:</h2>
  <div id="example2">
    <p>
      Možemo staviti jednu vrednost za sve ćoškove,
      ili četiri vrednosti, za svaki ćošak
      od gornjeg-levog do donjeg-levog po jednu.</p>
  </div>
</body>
</html>
```

border-radius: 25px:

Svojstvo border-radius definiše zakrivljenje ćoškova elementa.

border-radius: 50px 20px 50px 50px:

Možemo staviti jednu vrednost za sve ćoškove, ili četiri vrednosti, za svaki ćošak od gornjeg-levog do donjeg-levog po jednu.

HTML <input> tekst element

```
<!DOCTYPE html>
<html>
<body>
<h2>Polja za tekstualni unos</h2>
<form>
  <label for="fname">Ime:</label><br>
  <input type="text" id="fname" name="fname" value="Borivoje"><br>
  <label for="lname">Prezime:</label><br>
  <input type="text" id="lname" name="lname" value="Milošević">
</form>
<p>Note that the form itself is not visible.</p>
<p>Also note that the default width of text input fields is 20 characters.</p>
</body>
</html>
```

Polja za tekstualni unos

Ime:

Prezime:

Note that the form itself is not visible.

Also note that the default width of text input fields is 20 characters.

HTML <input> radio element - dugme

```
<!DOCTYPE html>
<html>
<body>
<h2>Radio Buttons</h2>
<p>Izaberite vaš omiljeni Web jezik:</p>
<form>
  <input type="radio" id="html" name="fav_language" value="HTML">
  <label for="html">HTML</label><br>
  <input type="radio" id="css" name="fav_language" value="CSS">
  <label for="css">CSS</label><br>
  <input type="radio" id="javascript" name="fav_language" value="JavaScript">
  <label for="javascript">JavaScript</label>
</form>
</body>
</html>
```

Radio Buttons

Izaberite vaš omiljeni Web jezik:

- HTML
- CSS
- JavaScript

HTML <input> Checkboxes element

```
<!DOCTYPE html>
<html>
<body>
<h2>Checkboxes</h2>
<p> <strong>input type="checkbox"</strong> definiše checkbox:</p>
<form action="/action_page.php">
  <input type="checkbox" id="vehicle1" name="vehicle1" value="Bicikl">
  <label for="vehicle1"> Ja imam bicikl</label><br>
  <input type="checkbox" id="vehicle2" name="vehicle2" value="Kola">
  <label for="vehicle2"> Ja imam kola</label><br>
  <input type="checkbox" id="vehicle3" name="vehicle3" value="Čamac">
  <label for="vehicle3"> Ja imam čamac</label><br><br>
  <input type="submit" value="Submit">
</form>
</body>
</html>
```

Checkboxes

input type="checkbox" definiše checkbox:

- Ja imam bicikl
- Ja imam kola
- Ja imam čamac

Submit

HTML <input> Submit element

```
<!DOCTYPE html>
<html>
<body>
<h2>HTML Forms</h2>
<form action="/action_page.php">
  <label for="fname">First name:</label><br>
  <input type="text" id="fname" name="fname" value="Borivoje"><br>
  <label for="lname">Last name:</label><br>
  <input type="text" id="lname" name="lname" value="Milošević"><br><br>
  <input type="submit" value="Submit">
</form>
<p>Ako se klikne na "Submit" dugme, podaci će biti poslani na stranicu koja se zove
"/action_page.php".</p>
</body>
</html>
```

HTML Forms


First name:
Borivoje
Last name:
Milošević

Submit

Ako se klikne na "Submit" dugme, podaci će biti poslani na stranicu koja se zove "/action_page.php".

Tekući datum


```
<script language=JavaScript>
<!-- Begin
var months=new Array(13);
months[1]="Januar";
months[2]="Februar";
months[3]="Mart";
months[4]="April";
months[5]="Maj";
months[6]="Juni";
months[7]="Juli";
months[8]="Avgust";
months[9]="Septembar";
months[10]="Oktobar";
months[11]="Novembar";
months[12]="Decembar";
var time=new Date();
var lmonth=months[time.getMonth() + 1];
var date=time.getDate();
var year=time.getFullYear();
if ((navigator.appName == "Microsoft Internet Explorer") && (year < 2000))
year="20" + year;
if (navigator.appName == "Netscape")
year=1900 + year;
document.write(lmonth + " ");
document.write(date + ", " + year);
// End -->
</script>
```



December 14, 2021

Prikaz tekućeg datuma

```
<! Primer 1>
<!DOCTYPE html>
<html>
<body>
<h1>Moj JavaScript zapis za on-klik prikaz datuma</h1>
<button type="button"
onclick="document.getElementById('demo').innerHTML = Date()">
Kliknuti ovde za prikazivanje datuma i vremena.</button>
<p id="demo"></p>
</body>
</html>
```



Moj JavaScript zapis za on-klik prikaz datuma

Kliknuti ovde za prikazivanje datuma i vremena.

Tue Dec 14 2021 14:27:06 GMT+0100 (Central Europe Standard Time)

CSS dizajn

```
<!DOCTYPE html>
<html>
<head>
<style>
/* Komentar u jednoj liniji */
p {
  color: red;
}
</style>
</head>
<body>
<p>Oboji ME!</p>
<p>Ovaj paragraf je stilizovan sa CSS.</p>
<p>CSS komentari se ne prikazuju i prevode.</p>
</body>
</html>
```



CSS dizajn

```
<!DOCTYPE html>
<html>
<head>
<style>
/* Komentar u jednoj liniji */
p {
  color: red;
}
</style>
</head>
<body>
<p>Oboji ME!</p>
<p>Ovaj paragraf je stilizovan sa CSS.</p>
<p>CSS komentari se ne prikazuju i prevode.</p>
</body>
</html>
```

Oboji ME!

Ovaj paragraf je stilizovan sa CSS.

CSS komentari se ne prikazuju i prevode.

CSS dizajn

```
<!DOCTYPE html>
<html>
<head>
<style>
p.center {
  text-align: center;
  color: red;}
p.large { font-size: 300%;}
</style>
</head>
<body>
<h1 class="center">Ovaj heading neće biti doeditovan</h1>
<p class="center">Ovaj paragraf će biti crven i smešten u centar.</p>
<p class="center large">Ovaj paragraf će biti crven, u centru, i velikim font-size.</p>
</body>
</html>
```

Ovaj heading neće biti doeditovan

Ovaj paragraf će biti crven i smešten u centar.

Ovaj paragraf će biti crven, u centru, i velikim font-size.

CSS Korišćenje unutrašnjeg stila

```
<!DOCTYPE html>
<html>
<head>
<style>
body { background-color: linen;}

h1 {
color: maroon;
margin-left: 40px;
}
</style>
</head>
<body>

<h1>Ovo je heading</h1>
<p>Ovo je paragraf.</p>

</body>
</html>
```



CSS Korišćenje više boja I stilova

```
<!DOCTYPE html>
<html>
<body>
<p>Isto kao boja "paradajz":</p>
<h1 style="background-color:rgb(255, 99, 71);">rgb(255, 99, 71)</h1>
<h1 style="background-color:#ff6347;">#ff6347</h1>
<h1 style="background-color:hsl(9, 100%, 64%);">hsl(9, 100%, 64%)</h1>
<p>Isto kao boja "paradajz", ali 50% transparentna:</p>
<h1 style="background-color:rgba(255, 99, 71, 0.5);">rgba(255, 99, 71, 0.5)</h1>
<h1 style="background-color:hsla(9, 100%, 64%, 0.5);">hsla(9, 100%, 64%, 0.5)</h1>
<p>Boje mogu biti specificirane korišćenjem RGB, HEX, HSL, ili nekom od transparentnih boja korišćenjem RGBA ili HSLA.</p>
</body>
</html>
```

Isto kao boja "paradajz":

rgb(255, 99, 71)

#ff6347

hsl(9, 100%, 64%)

Isto kao boja "paradajz", ali 50% transparentna:

rgba(255, 99, 71, 0.5)

hsla(9, 100%, 64%, 0.5)


Boje mogu biti specificirane korišćenjem RGB, HEX, HSL, ili nekom od transparentnih boja korišćenjem RGBA ili HSLA.

CSS Dizajniranje različitih okvira - borders

```
<!DOCTYPE html>
<html>
<head>
<style>
p.one { border-style: solid;
border-width: 5px;}
p.two { border-style: solid;
border-width: medium;}
p.three { border-style: dotted;
border-width: 2px;}
p.four { border-style: dotted;
border-width: thick;}
p.five { border-style: double;
border-width: 15px;}
p.six { border-style: double;
border-width: thick;}
</style>
</head>
<body>
<h2>Borderi i osobine</h2>
<p>Prikazane su širine pet dizajniranih bordera:</p>
<p class="one">Bilo koji tekst.</p>
<p class="two">Bilo koji tekst.</p>
<p class="three">Bilo koji tekst.</p>
<p class="four">Bilo koji tekst.</p>
<p class="five">Bilo koji tekst.</p>
<p class="six">Bilo koji tekst.</p>
<p><b>Note:</b> Uvek se mora specificirati "border-style" pre setovanja samog
okvira.</p>
</body>
</html>
```

Borderi i osobine

Prikazane su širine šest dizajniranih bordera:

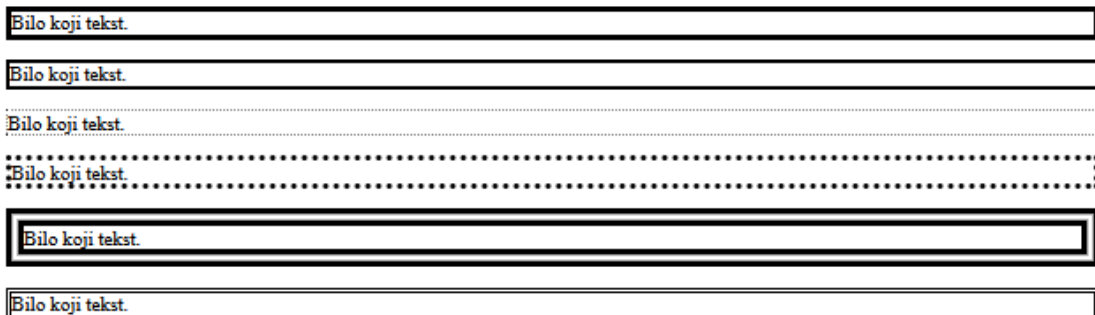


Note: Uvek se mora specificirati "border-style" pre setovanja samog okvira.

Radijalni gradijent slike

```
<!DOCTYPE html>
<html>
<head>
  <title>Primer 32</title>
  <meta charset="UTF-8">
  <style>
    .grad {height: 250px;
      width: 250px;
      display: inline-block;}
  #grad1 {background-image: radial-gradient
(closest-side, red, yellow, black);}
  #grad1-pos {background-image:
radial-gradient(closest-side at 30% 50%, red, yellow, black);}
  </style>
</head>
<body>
  <h1>Radial Gradients - Different size keywords and positions</h1>
  <h2>closest-side:</h2>
  <div id="grad1" class="grad"></div>
  <div id="grad1-pos" class="grad"></div>
  <p><strong>Note:</strong> Internet Explorer 9 and earlier
versions do not support gradients.</p>
</body>
</html>
```

Radial Gradients - Different size keywords and posi


closest-side:

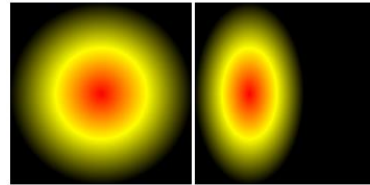

Note: Internet Explorer 9 and earlier versions do not support gradients.

CSS Pozicije slike u pozadini

```
<!DOCTYPE html>
<html>
<head>
<style>
body { background-image: url("img_tree.png");
  background-repeat: no-repeat;
  background-position: right top; margin-right: 200px;}
</style>
</head>
<body>
<h1>Slika u pozadini!</h1>
<p>Slika u pozadini se pokazuje samo jednom. Pozicionirana je van teksta.</p>
<p>Dodata je margina na desnoj strani tako da slika ne remeti tekst.</p>
</body>
</html>
```

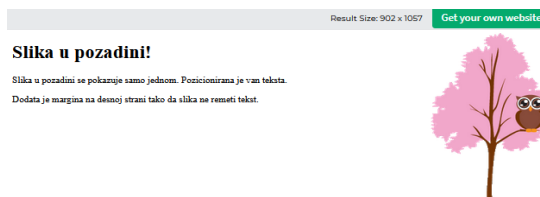

CSS Dopuna bordera oko teksta

```
<!DOCTYPE html>
<html>
<head>
<style>
div { border: 1px solid black;
padding: 25px 50px 75px 100px;
background-color: lightblue;}
</style>
</head>
<body>
<h2>Dopuna - padding bordera sa 4 vrednosti</h2>
<div>div element je na vrhu dopunjen sa 25px, desno 50px, na dnu 75px, i levo 100px.</div>
</body>
</html>
```

Dopuna - padding bordera sa 4 vrednosti

div element je na vrhu dopunjen sa 25px, desno 50px, na dnu 75px, i levo 100px.

CSS Setovanje visine i širine elementa

```
<!DOCTYPE html>
<html>
<head>
<style>
img.one { height: auto;}
img.two { height: 200px;
width: 200px;}
</style>
</head>
<body>
<h2>Setovanje visine i širine elementa</h2>
<p>Originalni image:</p>
<br>
<p>Umanjeni image (200x200 pixels):</p>
<br>
</body>
</html>
```

Setovanje visine i širine elementa

Originalni image:



Umanjeni image (200x200 pixels):




CSS Box model

```
<!DOCTYPE html>
<html>
<head>
<style>
div { background-color: lightgrey;
width: 300px;
border: 15px solid green;
padding: 50px;
margin: 20px;}
</style>
</head>
<body>
<h2>Demonstracija Box Modela</h2>
<p>CSS box model je ustvari kutija oko svakog HTML elementa. Sastoji se od: borders, padding, margins, i konteksta.</p>
<div>This text is the content of the box. We have added a 50px padding, 20px margin and a 15px green border. Ut enim ad minim veniam, quis nostrud exercitation ullamco laboris nisi ut aliquip ex ea commodo consequat. Duis aute irure dolor in reprehenderit in voluptate velit esse cillum dolore eu fugiat nulla pariatur. Excepteur sint occaecat cupidatat non proident, sunt in culpa qui officia deserunt mollit anim id est laborum.</div>
</body>
</html>
```

Demonstracija Box Modela

CSS box model je ustvari kutija oko svakog HTML elementa. Sastoji se od: borders, padding, margins, i konteksta.

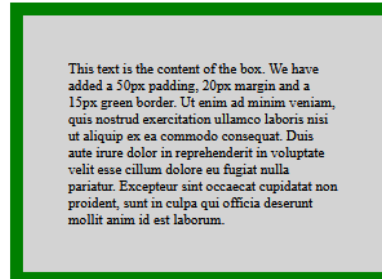

CSS Različite boje teksta

```
<!DOCTYPE html>
<html>
<head>
<style>
body { color: blue;}
h1 { color: green;}
</style>
</head>
<body>
<h1>Ovo je Heading 1</h1>
<p>This is an ordinary paragraph. Notice that this text is blue. The default text color for a page is defined in the body selector.</p>
<p>Another paragraph.</p>
</body>
</html>
```

This is heading 1

This is an ordinary paragraph. Notice that this text is blue. The default text color for a page is defined in the body selector.

Another paragraph.

CSS Dodavanje različitih ikona

```
<!DOCTYPE html>
<html>
<head>
<title>Font Awesome Icons</title>
<meta name="viewport" content="width=device-width, initial-scale=1">
<script src="https://kit.fontawesome.com/a076d05399.js" crossorigin="anonymous"></script>
<!--Get your own code at fontawesome.com-->
</head>
<body>
<h1>Biblioteka Font Awesome ikona</h1>
<p>Neke od Font Awesome ikona:</p>
<i class="fas fa-cloud"></i>
<i class="fas fa-heart"></i>
<i class="fas fa-car"></i>
<i class="fas fa-file"></i>
<i class="fas fa-bars"></i>
<p>Stilizovane Font Awesome ikone (veličina i boja):</p>
<i class="fas fa-cloud" style="font-size:24px;"></i>
<i class="fas fa-cloud" style="font-size:36px;"></i>
<i class="fas fa-cloud" style="font-size:48px;color:red;"></i>
<i class="fas fa-cloud" style="font-size:60px;color:lightblue;"></i>
</body>
</html>
```

Biblioteka Font Awesome ikona

Neke od Font Awesome ikona:



Stilizovane Font Awesome ikone (veličina i boja):



CSS Dodavanje teksta na dnu levo slike

```
<!DOCTYPE html>
<html>
<head>
<style>
.container { position: relative;}
.bottomleft { position: absolute;
  bottom: 8px; left: 16px;
  font-size: 18px;}
img { width: 100%; height: auto;
  opacity: 0.3;}
</style>
</head>
<body>
<h2>Image Text</h2>
<p>Add some text to an image in the bottom left corner:</p>
<div class="container">
  
  <div class="bottomleft">Bottom Left</div>
</div>
</body>
</html>
```

Image Text

Add some text to an image in the bottom left corner:



CSS Označavanje slike mišem-preko

```
<!DOCTYPE html>
<html>
<head>
<style>
img { opacity: 0.5;}
img:hover { opacity: 1.0;}
</style>
</head>
<body>
<h1>Image Transparency</h1>
<p>The opacity property is often used together with the :hover selector to change the opacity on mouse-over:</p>



</body>
</html>
```

Image Transparency


The opacity property is often used together with the :hover selector to change the opacity on mouse-over:



CSS Dodavanje elementa na poziciju desno

```
<!DOCTYPE html>
<html>
<head>
<style>
.right { position: absolute;
right: 0px; width: 300px;
border: 3px solid #73AD21;
padding: 10px;}
</style>
</head>
<body>
<h2>Right align with the position property</h2>
<p>An example of how to right align elements with the position property:</p>
<div class="right">
  <p>In my younger and more vulnerable years my father gave me some advice that I've been turning over in my mind ever since.</p>
</div>
</body>
</html>
```

Right align with the position property
An example of how to right align elements with the position property:

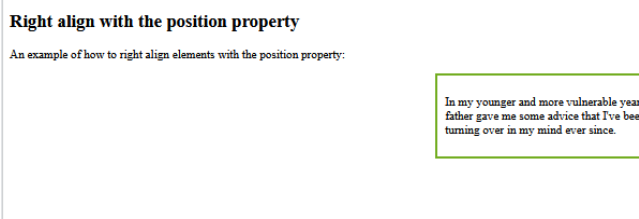


Statičko pozicioniranje

```
<!DOCTYPE html>
<html>
<head>
  <title>Primer 17</title>
  <meta charset="UTF-8">
  <style>
    #prvi { height: 100px;
width: 300px;
background-color: rgb(231, 43, 103); }
    #drugi { height: 100px; width: 300px;
background-color: rgb(24, 243, 232);
position: static; top: 30px; left: 80px; }
    #treći { height: 100px; width: 300px;
background-color: rgb(180, 55, 252); }
  </style>
</head>
<body>
  <div id="prvi"></div>
  <div id="drugi"></div>
  <div id="treći"></div>
</body>
</html>
```




Relativno pozicioniranje

```
<!DOCTYPE html>
<html>
<head>
<title>Primer 18</title>
<meta charset="UTF-8">
<style>
#prvi { height: 100px; width: 300px;
background-color: rgb(231, 43, 103); }
#drugi { height: 100px; width: 300px;
background-color: rgb(24, 243, 232);
position: relative; top: 30px; left: 80px; }
#treći { height: 100px; width: 300px;
background-color: rgb(180, 55, 252); }
</style>
</head>
<body>
<div id="prvi"></div>
<div id="drugi"></div>
<div id="treći"></div>
</body>
</html>
```

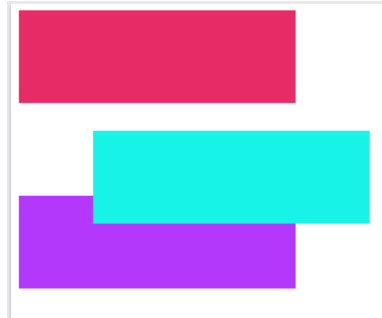

Apsolutno pozicioniranje


```
<!DOCTYPE html>
<html>
<head>
<title>Primer 19</title>
<meta charset="UTF-8">
<style>
#omotac { margin-top: 100px; height: 400px;
width: 400px;
background-color: rgba(218, 165, 32, 0.5); }
#prvi { height: 100px; width: 300px;
background-color: rgb(231, 43, 103);}
#drugi { height: 100px; width: 300px;
background-color: rgb(24, 243, 232);
position: absolute; top: 30px; left: 80px; }
#treći { height: 100px; width: 300px;
background-color: rgb(180, 55, 252); }
</style>
</head>
<body>
<div id="omotac">
<div id="prvi"></div>
<div id="drugi"></div>
<div id="treći"></div>
</div>
</body>
</html>
```



CSS Svojstva display i visibility

```
<html>
<head>
  <title>Primer 23</title>
  <meta charset="UTF-8">

  <style type="text/css">
    #omotac {border: 1px solid black; margin-left: auto;
      margin-right: auto; width: 400px;
      position: relative; }
    #zeleni { width: 400px; height: 50px;
      background-color: rgb(83, 255, 103);}
    #crveni { width: 100px; height: 200px;
      background-color: rgb(255, 53, 57);
      display: inline-block;}
    #zuti { width: 300px; height: 200px;
      background-color: rgb(255, 255, 65);
      display: inline-block; }
    #plavi {width: 400px; height: 50px;
      background-color: rgb(39, 230, 233); }
  </style>
</head>
<body>
  <div id="omotac">
    <div id="zeleni"></div>
    <div id="crveni"></div><div id="zuti"></div>
    <div id="plavi"></div>
  </div>
</body>
</html>
```





CSS Vertikalni navigacioni bar sa "active" klasom

```
<!DOCTYPE html>
<html>
<head>
<style>
ul { list-style-type: none;
margin: 0; padding: 0;
width: 200px;
background-color: #f1f1f1;}
```

```
li a { display: block;
color: #000;
padding: 8px 16px;
text-decoration: none;}
```

```
li a.active { background-color:
#04AA6D; color: white;}
```

```
li a:hover:not(.active)
{ background-color: #555;
color: white;}
```

```
</style>
</head>
<body>
```

```
<h2>Vertikalni bar za navigaciju</h2>
```

```
<p>Kreiramo "active" klasu sa zelenom pozadinom i belim tekstom. Klasa je dodata u "Home" link.</p>
```

```
<ul>
<li><a class="active" href="#home">Home</a></li>
<li><a href="#news">News</a></li>
<li><a href="#contact">Contact</a></li>
<li><a href="#about">About</a></li>
</ul>
```

```
</body>
</html>
```

Vertikalni bar za navigaciju

Kreiramo "active" klasu sa zelenom pozadinom i belim tekstom. Klasa je dodata u "Home" link.





CSS Horizontalni navigacioni bar sa "active" klasom

```
<!DOCTYPE html>
<html>
<head>
<style>
ul { list-style-type: none;
margin: 0; padding: 0;
overflow: hidden;
background-color: #333;}

li { float: left;}

li a {
display:
block;
color: white;
text-align: center;
padding: 14px 16px;
text-decoration: none;}

a:hover:not(.active)
{ background-color: #111;}

.active
{ background-color:#04AA6D}
</style>
</head>
<body>

<ul>
<li><a class="active" href="#home">Home</a></li>
<li><a href="#news">News</a></li>
<li><a href="#contact">Contact</a></li>
<li><a href="#about">About</a></li>
</ul>

</body>
</html>
```

Home

News

Contact

About

CSS Padajući meni

```
<!DOCTYPE html>
<html>
<head>
<style>
.dropbtn { background-color: #4CAF50;
color: white; padding: 16px;
font-size: 16px; border: none;
cursor: pointer;}
.dropdown { position: relative;
display: inline-block;}
.dropdown-content
{ display: none;
position: absolute;
background-color: #f9f9f9;
min-width: 160px;
box-shadow: 0px 8px 16px 0px rgba(0,0,0,0.2);
z-index: 1;}
.dropdown-content a
{ color: black;
padding: 12px 16px;
text-decoration: none;
display: block;}
.dropdown-content a:hover {background-color: #f1f1f1}
.dropdown:hover .dropdown-content
{ display: block;}
.dropdown:hover .dropbtn
{ background-color: #3e8e41;}
</style>
</head>
<body>
<h2>Dropdown Menu</h2>
<p>Move the mouse over the button to open the dropdown menu.</p>
<div class="dropdown">
  <button class="dropbtn">Dropdown</button>
  <div class="dropdown-content">
    <a href="#">Link 1</a>
    <a href="#">Link 2</a>
    <a href="#">Link 3</a>
  </div>
</div>
<p><strong>Note:</strong> We use href="#" for test links. In a real web site this would be
URLs.</p>
</body>
</html>
```



CSS Stilovi za dugmad

```
<!DOCTYPE html>
<html>
<head>
<style>
input[type=button], input[type=submit], input[type=reset]
{ background-color: #4CAF50;
  border: none;
  color: white;
  padding: 16px 32px;
  text-decoration: none;
  margin: 4px 2px;
  cursor: pointer;}
</style>
</head>
<body>
<h2>Stilovi za dugmad - Buttons</h2>
<input type="button" value="Button">
<input type="reset" value="Reset">
<input type="submit" value="Submit">
</body>
</html>
```

Stilovi za dugmad - Buttons



CSS Linearni gradient pozadine - Odozgo na dole

```
<!DOCTYPE html>
<html>
<head>
<style>
#grad1
{ height: 200px;
  background-color: red;
  background-image: linear-gradient(red, yellow);}
</style>
</head>
<body>

<h1>Linearni gradient - Odozgo na dole</h1>
<p>Startuje crveno na vrhu, prelazeći u žuto prema dole:</p>

<div id="grad1"></div>

</body>
</html>
```

Linearni gradient - Odozgo na dole

Startuje crveno na vrhu, prelazeći u žuto prema dole:



CSS Tranzicija + Transformacija

```
<!DOCTYPE html>
<html>
<head>
<style>
div { width: 100px;
height: 100px; background: red;
transition: width 2s, height 2s, transform 2s;}
div:hover
{ width: 300px; height: 300px;
transform: rotate(180deg);}
</style>
</head>
<body>
<h1>Tranzicija + Transformacija</h1>
<p>Preći mišem na element ispod:</p>
<div></div>
</body>
</html>
```

Tranzicija + Transformacija

Preći mišem na element ispod:



Tranzicija + Transformacija

Preći mišem na element ispod:



CSS Kaži mi šta je to - TIP ?

```
<!DOCTYPE html>
<html>
<style>
.tooltip { position: relative; display: inline-block;
border-bottom: 1px dotted black;}
.tooltip .tooltiptext
{ visibility: hidden; width: 120px; background-color: black;
color: #fff; text-align: center;
border-radius: 6px; padding: 5px 0;
/* Position the tooltip */
position: absolute; z-index: 1; top: -5px;
left: 105%;}
.tooltip:hover .tooltiptext
{ visibility: visible;}
</style>
<body style="text-align:center;">
<h2>Kaži mi šta je to</h2>
<p>Preći mišem preko teksta ispod:</p>
<div class="tooltip">Predji preko mene
<span class="tooltiptext">Objašnjenje....</span>
</div>
</body>
</html>
```

Kaži mi šta je to

Preći mišem preko teksta ispod:

Predji preko mene

Kaži mi šta je to

Preći mišem preko teksta ispod:

Predji preko mene **Objašnjenje...**

CSS Specifikacija širine između kolona

```
<!DOCTYPE html>
```

```
<html>
```

```
<head>
```

```
<style>
```

```
.newspaper { column-count: 3;
```

```
column-gap: 40px;
```

```
column-rule-style: solid;
```

```
column-rule-width: 1px;}
```

```
</style>
```

```
</head>
```

```
<body>
```

```
<h1>Set the Rule Width</h1>
```

```
<div class="newspaper">
```

Lorem ipsum dolor sit amet, consectetur adipiscing elit, sed diam nonummy nibh euismod tincidunt ut laoreet dolore magna aliquam erat volutpat. Ut wisi enim ad minim veniam, quis nostrud exerci tation ullamcorper suscipit lobortis nisl ut aliquip ex ea commodo consequat. Duis autem vel eum iriure dolor in hendrerit in vulputate velit esse molestie consequat, vel illum dolore eu feugiat nulla facilisis at vero eros et accumsan et iusto odio dignissim qui blandit praesent luptatum zzril delenit augue duis dolore te feugait nulla facilisi. Nam liber tempor cum soluta nobis eleifend option congue nihil imperdiet doming id quod mazim placerat facer possim assum.

```
</div>
```

```
</body>
```

```
</html>
```

Set the Rule Width

Lorem ipsum dolor sit amet, consectetur adipiscing elit, sed diam nonummy nibh euismod tincidunt ut laoreet dolore magna aliquam erat volutpat. Ut wisi enim ad minim veniam, quis nostrud exerci tation ullamcorper suscipit lobortis

nisl ut aliquip ex ea commodo consequat. Duis autem vel eum iriure dolor in hendrerit in vulputate velit esse molestie consequat, vel illum dolore eu feugiat nulla facilisis at vero eros et accumsan et iusto odio dignissim qui blandit praesent

luptatum zzril delenit augue duis dolore te feugait nulla facilisi. Nam liber tempor cum soluta nobis eleifend option congue nihil imperdiet doming id quod mazim placerat facer possim assum.

CSS Promena veličine okvira sa slajderom

```
<!DOCTYPE html>
```

```
<html>
```

```
<head>
```

```
<style>
```

```
div { border: 2px solid;
```

```
padding: 20px; width: 300px;
```

```
resize: vertical; overflow: auto;}
```

```
</style>
```

```
</head>
```

```
<body>
```

```
<h1>Promena veličine</h1>
```

```
<div>
```

```
<p>Promena visine ovog div elementa.</p>
```


```
<p>Kliknuti mišem na desni donji ćošak div elementa.</p>
```

```
</div>
```


```
</body>
```

```
</html>
```

Promena veličine

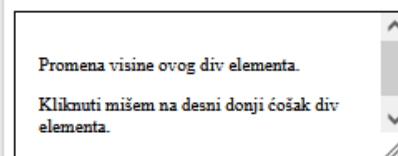

Promena veličine

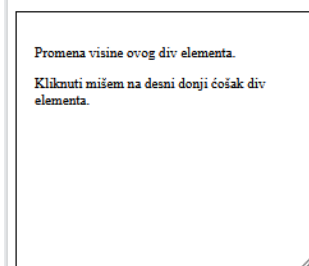



CSS Geolokacija sa koordinatama

```
<!DOCTYPE html>
<html>
<body>
<p>Klik na dugme za dobijanje vaših koordinata.</p>
<button onclick="getLocation()">Geo Lati/Long</button>
<p id="demo"></p>
<script>
var x = document.getElementById("demo");
function getLocation()
{ if (navigator.geolocation)
{ navigator.geolocation.getCurrentPosition(showPosition);}
else {x.innerHTML = "Geolocation is not supported by this browser.";}
}
function showPosition(position)
{ x.innerHTML = "Latitude: " + position.coords.latitude +
  "<br>Longitude: " + position.coords.longitude;}
</script>
</body>
</html>
```

Klik na dugme za dobijanje vaših koordinata.

Klik na dugme za dobijanje vaših koordinata.

Geo Lati/Long

Geo Lati/Long

Latitude: 43.330139628302376
Longitude: 21.918142575987442

CSS Video element

```
<!DOCTYPE html>  
<html>  
<body>  
  
<video width="320" height="240" controls>  
  <source src="movie.mp4" type="video/mp4">  
  <source src="movie.ogv" type="video/ogg">  
  Your browser does not support the video tag.  
</video>  
  
</body>  
</html>
```



CSS YouTube element

```
<!DOCTYPE html>  
<html>  
<body>  
<iframe width="420" height="345"  
src="https://www.youtube.com/embed/tgbNymZ7vqY">  
</iframe>  
</body>  
</html>
```





CSS Slika sa linkom

```
<!DOCTYPE html>
<html>

<head>
  <title>Primer 26</title>
  <meta charset="UTF-8">

  <style type='text/css'>
    #test_div {
      height: 900px;
      width: 1200px;
      background-image:
      url('https://timesofindia.
      indiatimes.com/thumb/msid-80040550,
      width-1200,height-900,resizemode-
      4/.jpg');
    }

    #test_div p {
      color: white;
      text-align: center;
      font-family: 'Segoe UI', Tahoma, Geneva, Verdana, sans-serif;
      font-size: 50px;
      margin: 0px;
      padding-top: 1cm;
    }
  </style>
</head>

<body>
  <div id='test_div'>
    <p>Spremni za slavlje?</p>
  </div>
</body>

</html>
```





HTML Adres element

```
<!DOCTYPE html>
<html>
<body>
<p> HTML adres element definiše kontaktne informacije (autor/owner) dokumenta ili članka.</p>
<address>
Napisao Borivoje Milošević.<br>
Kontakt:borivojemilosevic@yahoo.com<br>
18000 Niš<br>
Lepa ulica 33<br>
Srbija
</address>
</body>
</html>
```

HTML adres element definiše kontaktne informacije (autor/vlasnik) dokumenta ili članka.


*Napisao Borivoje Milošević.
Kontakt: borivojemilosevic@yahoo.com
18000 Niš
Lepa ulica 33
Srbija*

HTML Link na izabrani sajt

```
<!DOCTYPE html>
<html>
<body>
<h1>HTML Link</h1>
<p><a href="https://translate.google.com/?sl=en&tl=hr&op=translate">Posetite Google prevodilac!</a></p>
</body>
</html>
```

HTML Link

[Posetite Google prevodilac!](https://translate.google.com/?sl=en&tl=hr&op=translate)

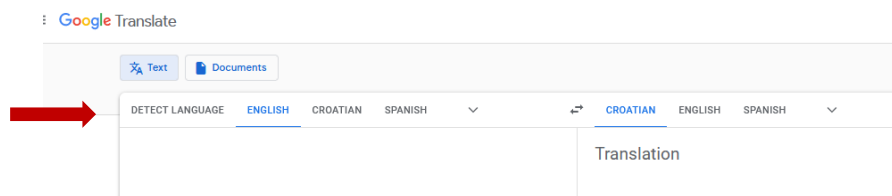



HTML Slanje mejlova na odredjenu adresu (samo subjekt)

```
<!DOCTYPE html>
<html>
<body>
<p>
Ovo je email link:
<a href="mailto:borivojemilosevic@yahoo.com?Subject=Hello%20again" target="_top">
Send Mail</a>
</p>
<p>Link će raditi samo ako imamo instalitan email.</p>
</body>
</html>
```

Ovo je email link: [Send Mail](mailto:borivojemilosevic@yahoo.com?Subject=Hello%20again)

Link će raditi samo ako imamo instalitan email.



To  borivojemilosevic@yahoo.com

Hello again

HTML Lista sa brojevima različitog formata

```
<!DOCTYPE html>
<html>
<body>
<h2>Uredjena lista sa brojevima</h2>
<ol type="1">
<li>Kafa</li>
<li>Čaj</li>
<li>Mleko</li>
<li>Kapućino</li>
<li>Nes</li>
<li>Makijato</li>
</ol>
<h2>Uredjena lista sa rimskim brojevima</h2>
<ol type="i">
<li>Kafa</li>
<li>Čaj</li>
<li>Mleko</li>
<li>Kapućino</li>
<li>Nes</li>
<li>Makijato</li>
</ol>
</body>
</html>
```

Uredjena lista sa brojevima

1. Kafa
2. Čaj
3. Mleko
4. Kapućino
5. Nes
6. Makijato

Uredjena lista sa rimskim brojevima

- i. Kafa
- ii. Čaj
- iii. Mleko
- iv. Kapućino
- v. Nes
- vi. Makijato

Korišćenje id Attributa u JavaScript jeziku

```
<!DOCTYPE html>
<html>
<body>
<h2>Korišćenje id Attributa u JavaScript</h2>
<p>JavaScript može pristupiti elementu sa specificiranim
id korišćenjem getElementById() metode:</p>

<h1 id="myHeader">Za sada ZDRAVO!</h1>
<button onclick="displayResult()">Promeni tekst text</button>
<script>
function displayResult() {
  document.getElementById("myHeader").innerHTML = "Želim vam prijatan dan!";
}
</script>
</body>
</html>
```

Korišćenje id Attributa u JavaScript

JavaScript može pristupiti elementu sa specificiranim id korišćenjem getElementById() metode:

Za sada ZDRAVO!

Promeni tekst text



Korišćenje id Attributa u JavaScript

JavaScript može pristupiti elementu sa specificiranim id korišćenjem getElementById() metode:

Želim vam prijatan dan!

Promeni tekst text

HTML base element


```
<!DOCTYPE html>
<html>
<head>
  <base href="https://www.ppf.edu.rs/" target="_blank">
</head>
<body>
<h1>Osnovni element</h1>
<p> - Kada definišemo osnovnu URL u head sekciji, browser će potražiti sliku u
https://www.w3schools.com/images/stickman.gif".</p>
<p><a href="/studijски-програми/">Studijski programi</a> - Link se otvara u novom prozoru iako nema
atribut "_blank" i vodi nas na sajt fakulteta u opciju "Studijski programi".</p>
</body>
</html>
```

Osnovni element



- Kada definišemo osnovnu URL u head sekciji, browser će potražiti sliku u <https://www.w3schools.com/images/stickman.gif>".

[Studijski programi](#) - Link se otvara u novom prozoru iako nema atribut "_blank" i vodi nas na sajt fakulteta u opciju "Studijski programi".





HTML select element

```

<!DOCTYPE html>
<html>
<body>

<h2>HTML selekt element</h2>

<p>Definiše drop-down listu:</p>

<form action="/action_page.php">
  <label for="cars">IZABERI AUTO:</label>
  <select id="cars" name="cars">
    <option value="volvo">Volvo</option>
    <option value="saab">Saab</option>
    <option value="fiat">Fiat</option>
    <option value="audi">Audi</option>
  </select>
  <input type="submit">
</form>

</body>
</html>

```

HTML selekt element


Definiše drop-down listu:

IZABERI AUTO:

HTML selekt element

Definiše drop-down listu:

IZABERI AUTO:



CSS Primer početne strane

```

<!DOCTYPE html>
<html>
<head>
<style>
body { background-color: lightblue;}
h1 { color: white;
text-align: center;}
p { font-family: verdana;
font-size: 20px;}
</style>
</head>
<body>

<h1>CSS Primer početne strane</h1>
<p>Ovo je paragraf.</p>

</body>
</html>

```

CSS Primer početne strane

Ovo je paragraf.



```
<!DOCTYPE html>
<html>
<head>
<style>
table, th, td
{ border: 1px solid black;
  border-collapse: collapse;}
th, td
{ padding: 5px;}
th
{ text-align: left;}
</style>
</head>
<body>
<h2>Levo ravnanje tabela</h2>
<p>Levo ravnanje tabela korišćenjem CSS osobina za ravnanje teksta.</p>
<table style="width:100%">
  <tr>
    <th>Ime</th>
    <th>Prezime</th>
    <th>Starost</th>
  </tr>
  <tr>
    <td>Pera</td>
    <td>Perić</td>
    <td>50</td>
  </tr>
  <tr>
    <td>Zlata</td>
    <td>Zlatic</td>
    <td>94</td>
  </tr>
  <tr>
    <td>Dule</td>
    <td>Dulić</td>
    <td>80</td>
  </tr>
</table>

</body>
</html>
```

Levo ravnanje tabela



Levo ravnanje tabela korišćenjem CSS osobina za ravnanje teksta.

Ime	Prezime	Starost
Pera	Perić	50
Zlata	Zlatic	94
Dule	Dulić	80

Kako koristiti Wix (Korak po korak Tutorial)

Link za Moj Blog:

<https://bmilosevic26031951.wixsite.com/borin-blog>

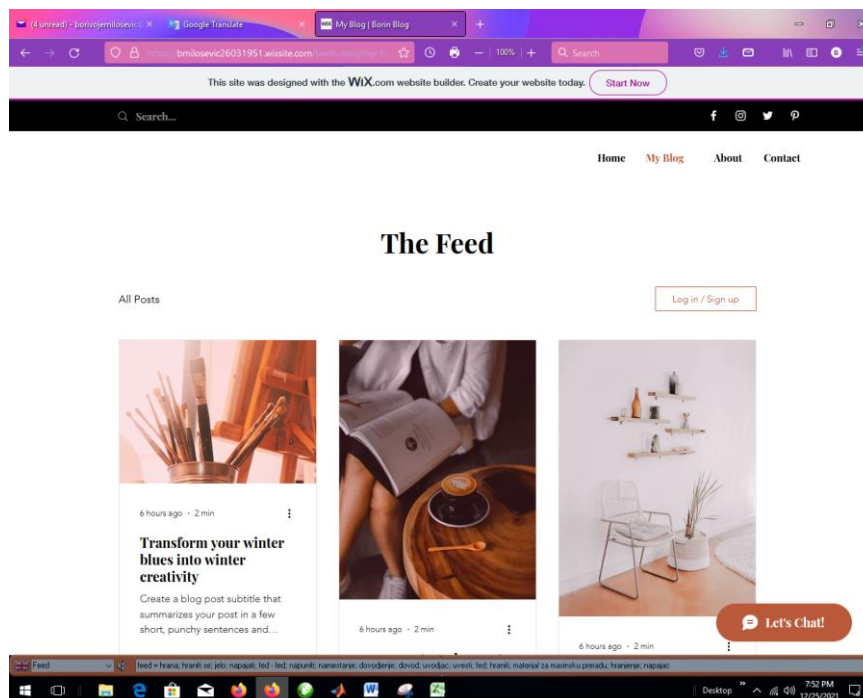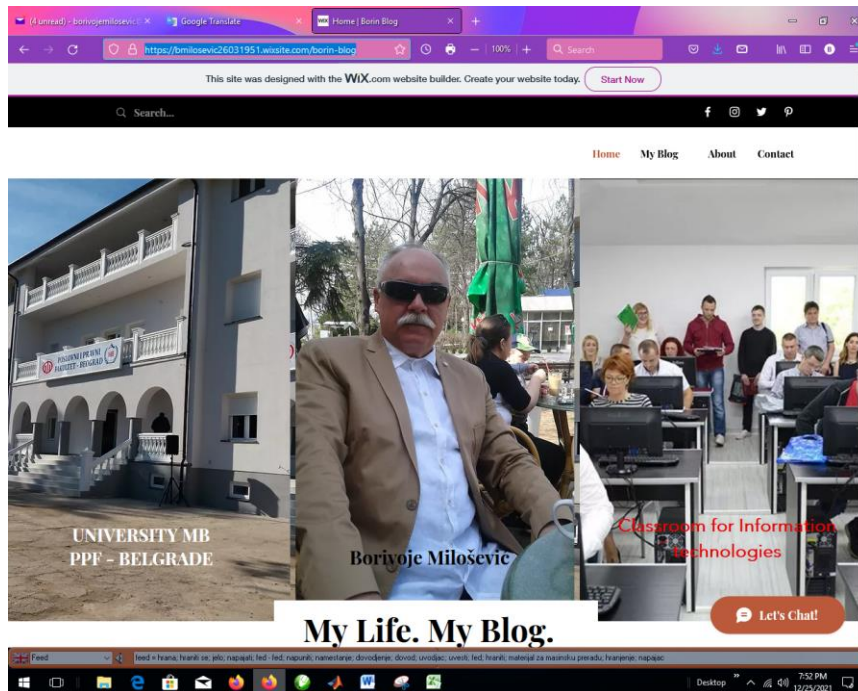



4 unread - borivojemilosevic x Google Translate x About | Born Blog x

https://bmlilosevic26031951.wixsite.com/born-blog

This site was designed with the WIX.com website builder. Create your website today. Start Now


Search...

Home My Blog About Contact

UPOZNAJ ME

PHD Borivoje Milosevic was born in Kragujevac, Serbia on 26th March 1951. He finished elementary school, music school and grammar school in Nis, with honors, in addition to numerous awards for achievements in mathematics, physics and languages. Later, he graduated from the Faculty of Electronic Engineering in Nis, final paper "Programmed Learning of the Assembler Language". During his studies he was in charge of organizing cultural life at the faculty. He defended his postgraduate thesis "The Transfer of Telecommunications Signals Through a Low-voltage Power Grid - PLC" at the Faculty of Electronic Engineering in Nis on 16th July 2002. His PhD thesis entitled "Software Package for Determining the Performance of Digital Communication Systems in the Presence of Fading," was defended at the Faculty of Computer Science at Megatrend University in Belgrade on 27th June 2011. 2017. his second PhD thesis entitled "Analysis of propagation of digital TK signals in the presence of small - scale FADING" was defended at the Faculty of Computer Science at John Naisbitt University in Belgrade, Serbia.

He has published 120 scientific papers, six of them being published in journals that are on the list with a SCI impact factor. Also, he has published fourteen books in various fields of science and technology, mainly related to the subject matter he is dealing with as a professor. Since 1998, he is working at The College of Applied Technical Sciences in Nis, as a professor of professional and specialist studies. In the period from March 2006 to March 2008 he was the Head of Electronics - Energy.

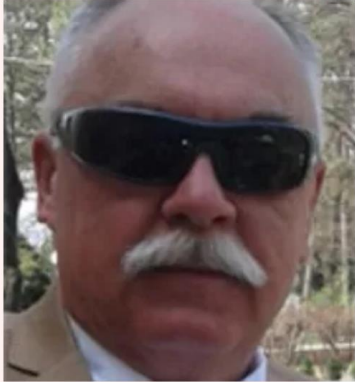

Let's Chat!

Feed | feed - hrana, hraniti se, jelo, napajati, fed - fed, napuniti, namjestanje, dovođenje, dovod, uvodac, uvesti, fed, hraniti, materijal za masiniku, preadu, hranjenje, napajac

Desktop 7:53 PM 12/25/2021

4 unread - borivojemilosevic x Google Translate x Home | Born Blog x

https://bmlilosevic26031951.wixsite.com/born-blog

This site was designed with the WIX.com website builder. Create your website today. Start Now

Search...

Home My Blog About Contact

Let me know what's on your mind

First Name

Last Name

Email *

Leave us a message...

Submit

Let's Chat!



© 2023 by Turning Heads. Proudly created with Wix.com

Feed | feed - hrana, hraniti se, jelo, napajati, fed - fed, napuniti, namjestanje, dovođenje, dovod, uvodac, uvesti, fed, hraniti, materijal za masiniku, preadu, hranjenje, napajac

Desktop 7:53 PM 12/25/2021



Univerzitet MB
Tvoj Univerzitet

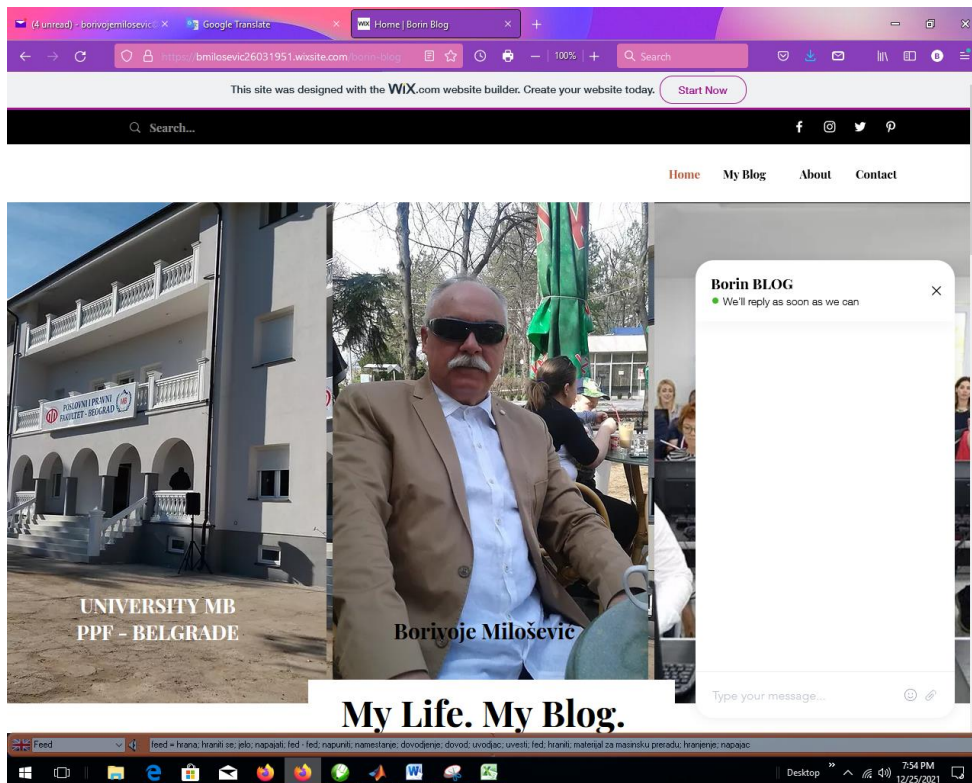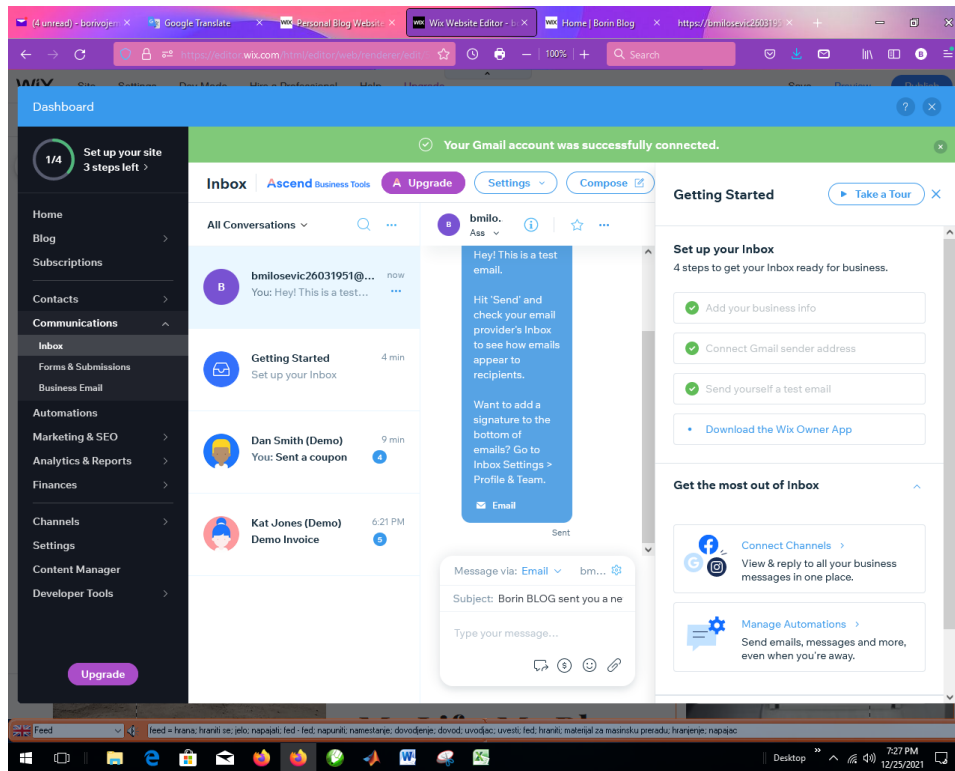



OVO JE POSTUPAK ZA DIZAJNIRANJE SOPSTVENOG BLOGA

Uputstvo za Seminarski rad

Wix je jedan od najpopularnijih alata za izradu web stranica. Više od 180 miliona ljudi koristi ga širom sveta.


I toliko je popularan sa dobrim razlogom - Wix je vrlo prilagođen početnicima prilikom dizajniranja svojih WEB stranica i jednostavan za korišćenje zahvaljujući svom fleksibilnom editoru. Može se koristiti za izradu poslovnih/ličnih WEB stranica, internetskih trgovina i portfelja.

Dakle, ako se pitate kako izraditi WEB stranicu pomoću Wixa, na pravom ste mestu.

U ovom vodiču korak po korak pokazaćemo vam svaki deo procesa izrade Wix WEB stranice.

Spremni? Započnimo...

1. [Signing up](#) with Wix

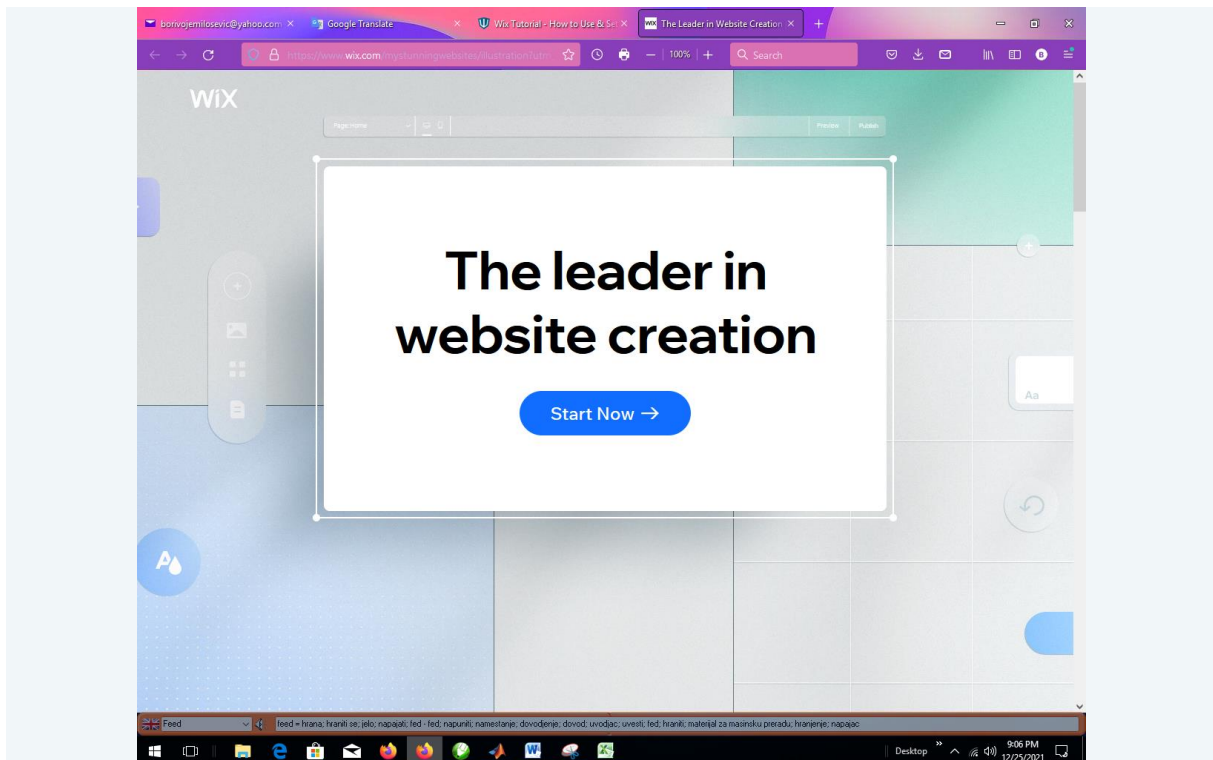



Wix

Log In

Don't have an account? [Sign Up](#)

Email

Password

Remember Me [Forgot Password or Email?](#)

Log In

Continue with Facebook

Continue with Google

Continue with Apple

* By logging in, you agree to our [Terms of Use](#) and to receive Wix emails & updates and acknowledge that you read our [Privacy Policy](#).

This site is protected by reCAPTCHA Enterprise and the Google [Privacy Policy](#) And [Terms of Use](#) apply

Wix

Sign Up

Already have an account? [Log In](#)

Email

Type your email again

Password

Type your password again



Sign Up

Continue with Facebook

Continue with Google

* By signing up, you agree to our [Terms of Use](#) and to receive Wix emails & updates and acknowledge that you read our [Privacy Policy](#).

This site is protected by reCAPTCHA Enterprise and the Google [Privacy Policy](#) And [Terms of Use](#) apply

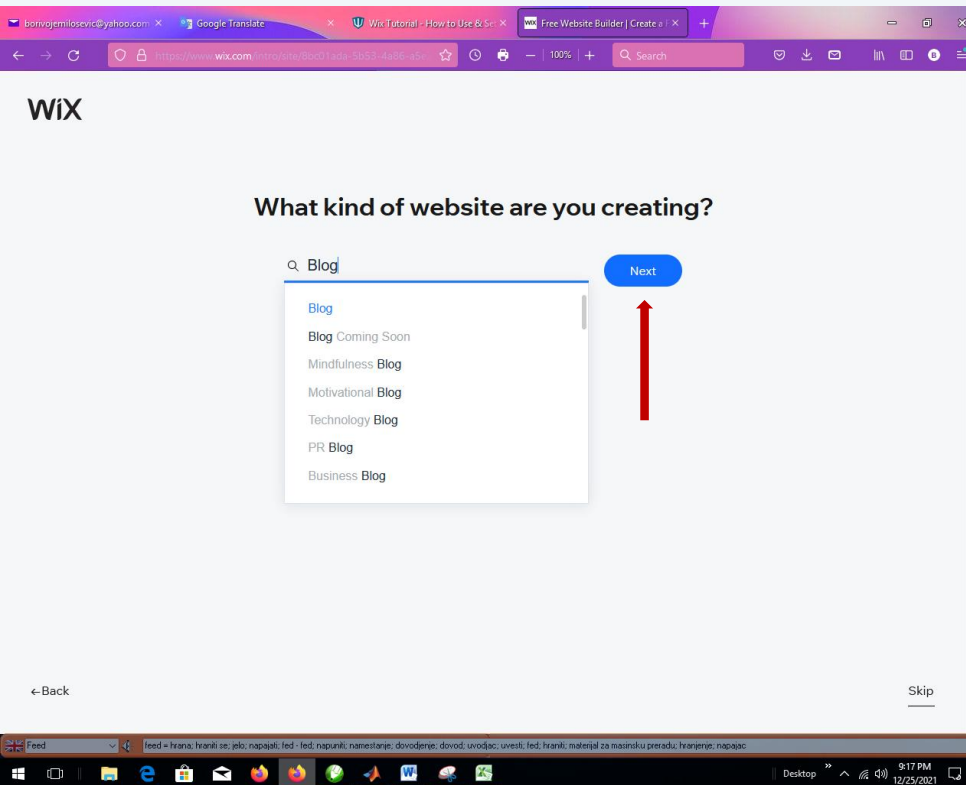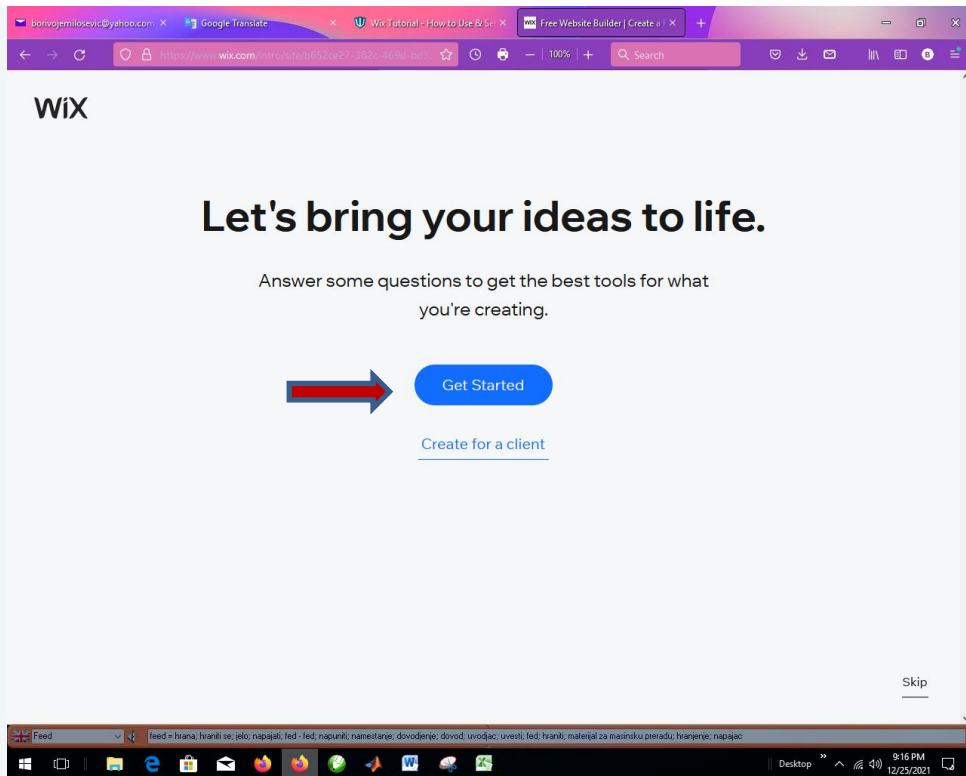



WIX

What do you want to add to your website?

Recommended for You

- Blog**
Write posts to drive traffic and share your ideas.
- Chat**
Chat with site visitors from desktop or mobile.
- Online Store**
Sell your products or find new products to sell.
- Forms**
Get info, subscribers & payments with Forms.

View More

- Instagram Feed**
Display your pics & videos from Instagram.
- Bookings**
Let clients schedule appointments on your site.
- Events**
Create events, sell tickets & track RSVPs.
- Pricing Plans**
Sell subscriptions & memberships.
- Video**
Share, stream and sell your videos.
- Music**
Stream and sell your music commission free.
- Online Programs**
Create and sell step-by-step training programs.
- Forum**
Start discussions and build community.

← Back **Next** Skip

Feed | feed = hrana, hraniti se, jelo, napajati; fed - fed napuniti; namestanje; dovođenje; dovoz; uvođač; uvesti; fed; hraniti; materijal za masinsku preradu; hranjenje; napajac

Desktop 9:19 PM 12/25/2021

WIX



Have you created a website before?



- This is my first time
- I've created a few
- I've created many
- I create sites for clients professionally

← Back Skip

Feed | feed = hrana, hraniti se, jelo, napajati; fed - fed napuniti; namestanje; dovođenje; dovoz; uvođač; uvesti; fed; hraniti; materijal za masinsku preradu; hranjenje; napajac


Desktop 9:21 PM 12/25/2021

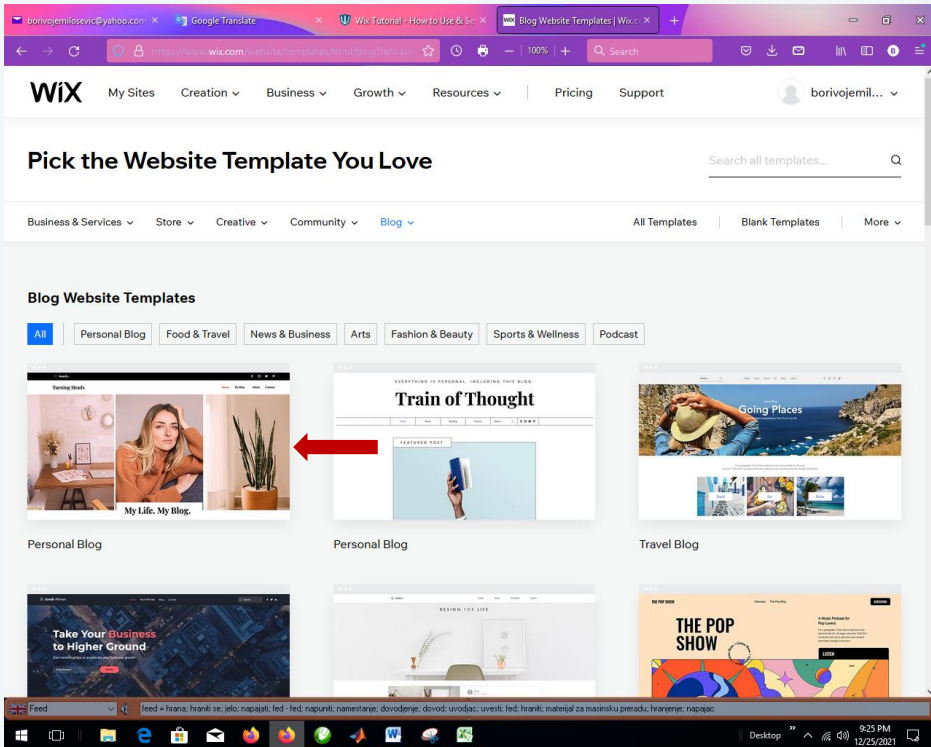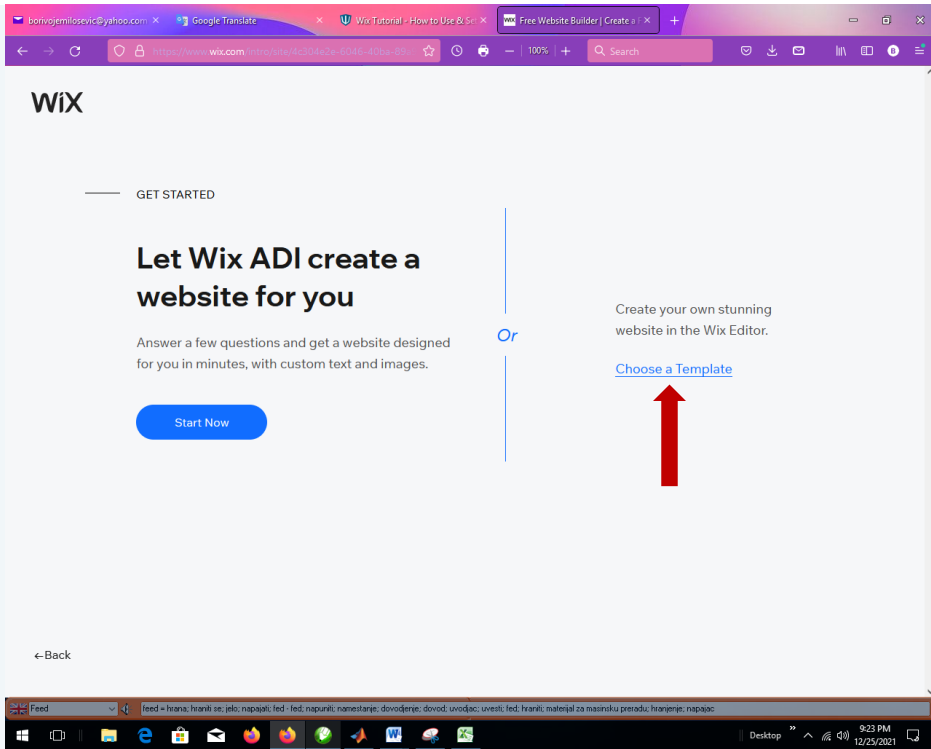

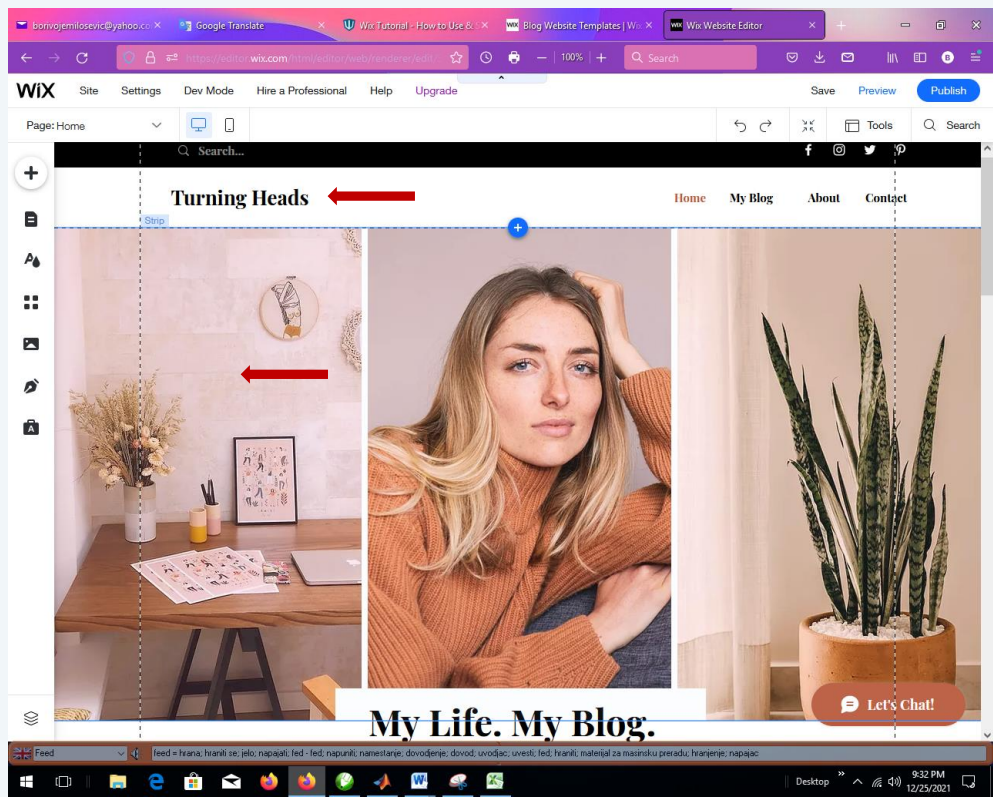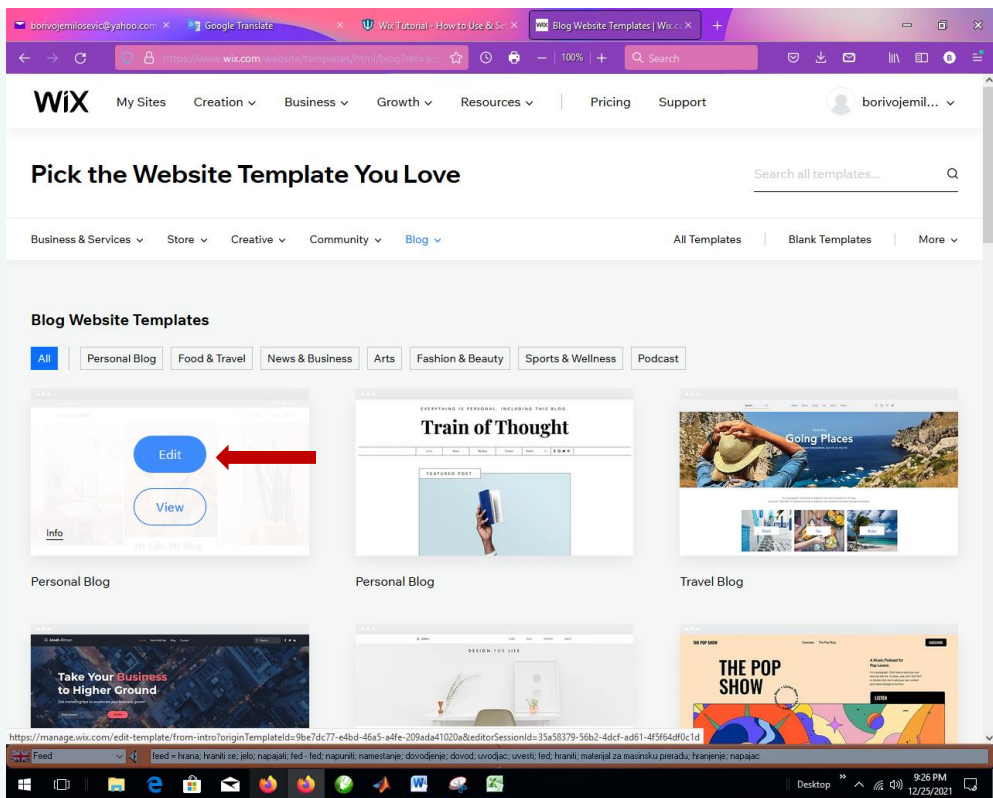


Dobili ste predloženi izgled Home strane. U glavnom meniju dalje imate opcije: My Blog, About, Contact.


Dva puta kliknite na Turning Heads i unesite svoj tekst za zaglavlje (možete podesiti tekst u prozoru editora teksta):

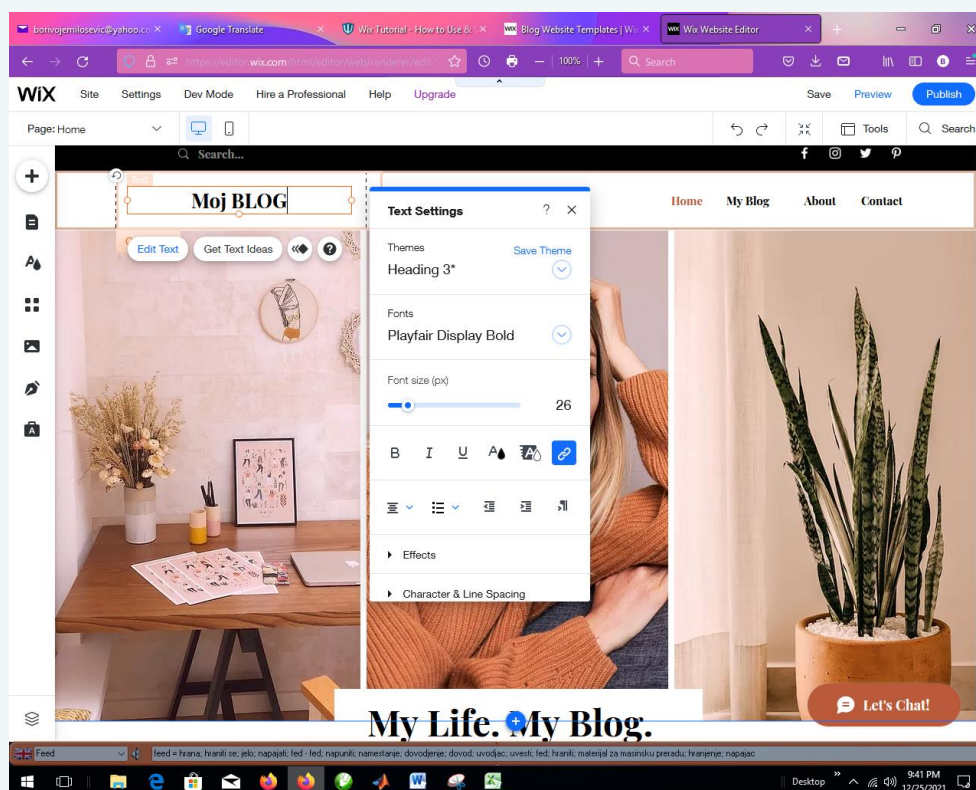


Označite prvu levu sliku i pripremite svoju sliku koju ćete prevući u oblast prve slike. Kliknuti na Change Column Background:

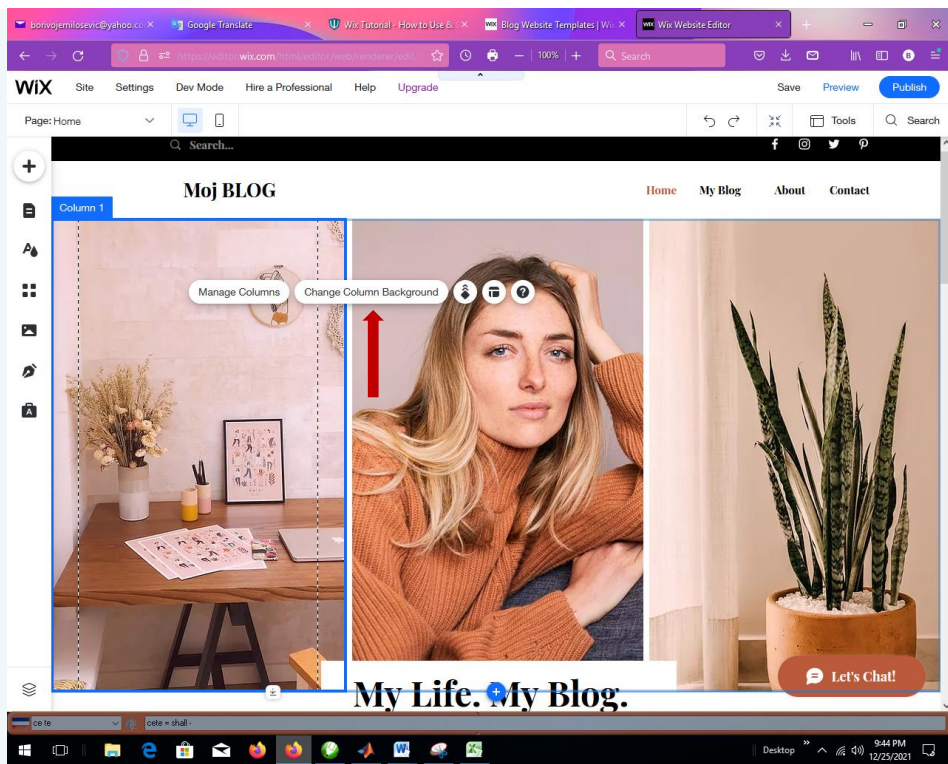


Kliknuti na Image:

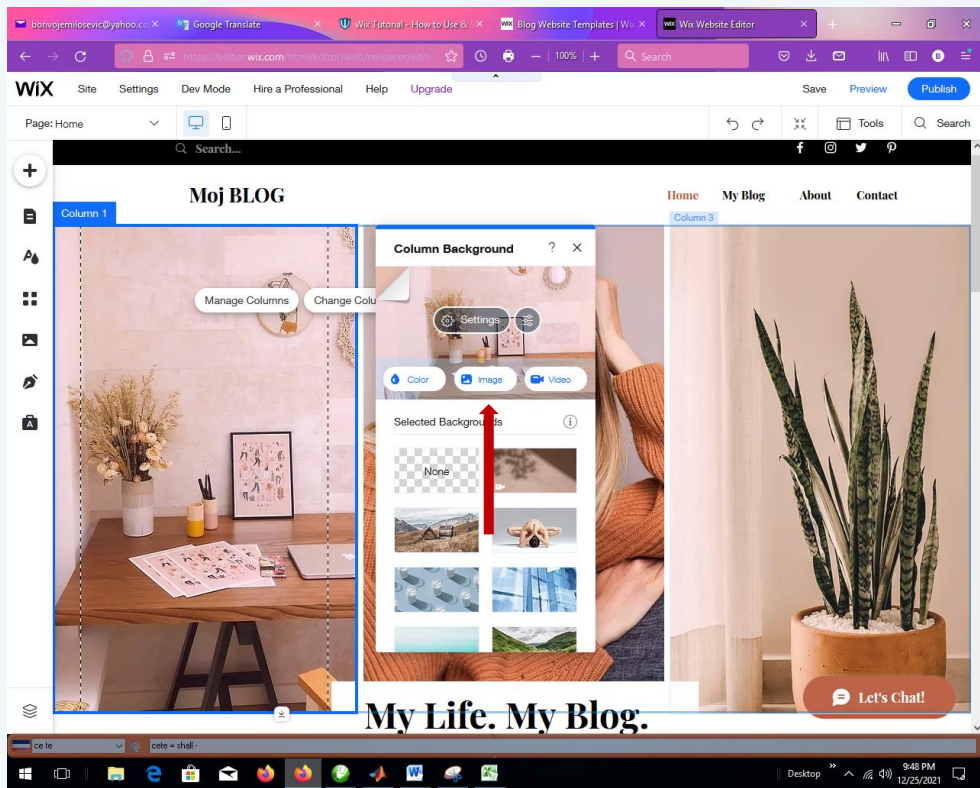



Kliknuti na Upload Media:

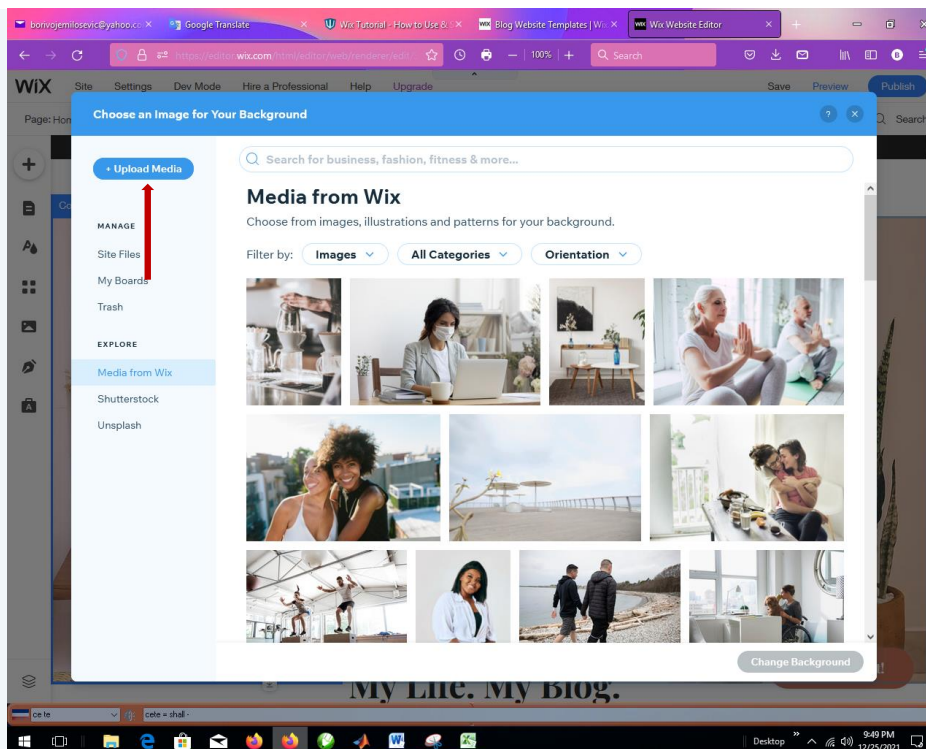


Prevući sloju prvu sliku o ublast ili je uvesti direktno sa foldera:

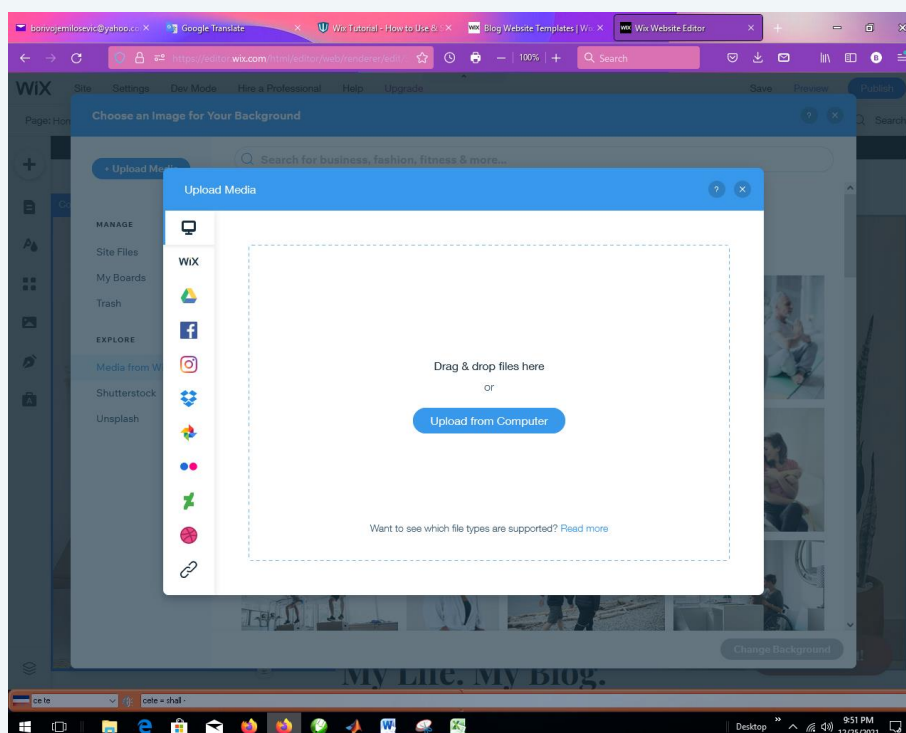


Pritisnuti taster Change Background:

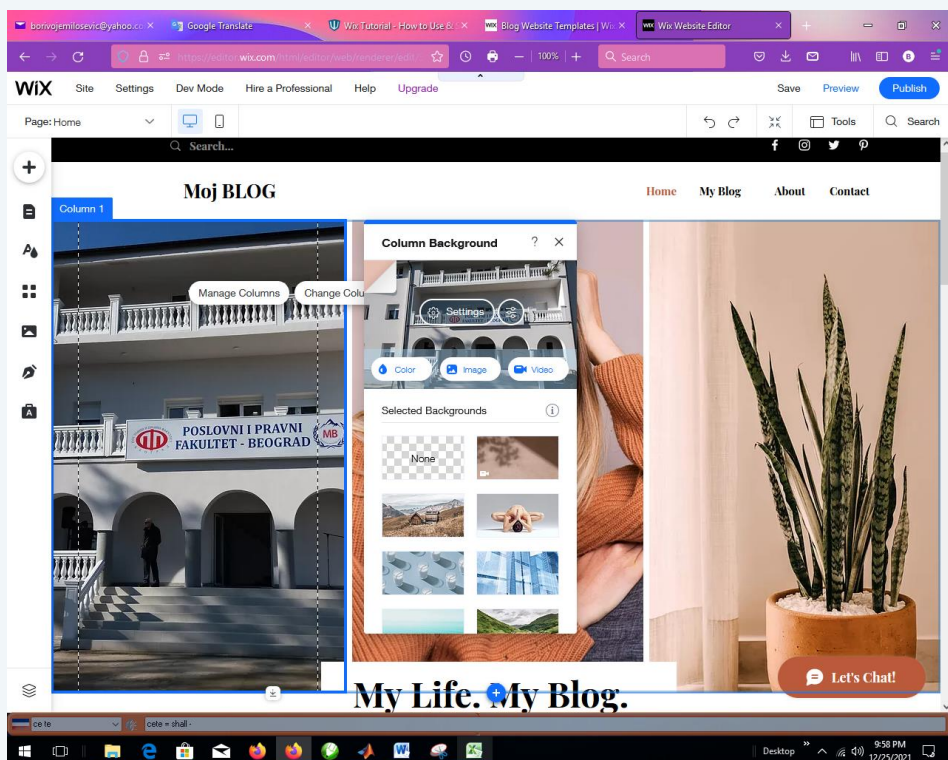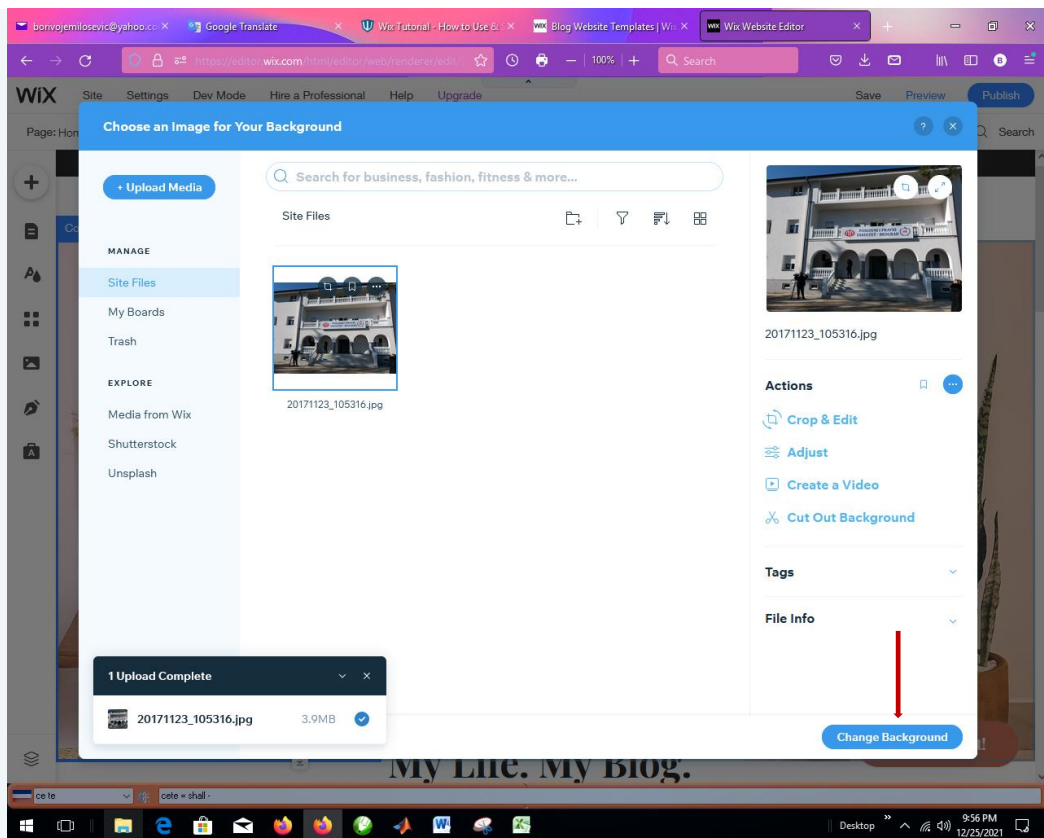


Umetnuti teks za prvu sliku opcijom ADD:

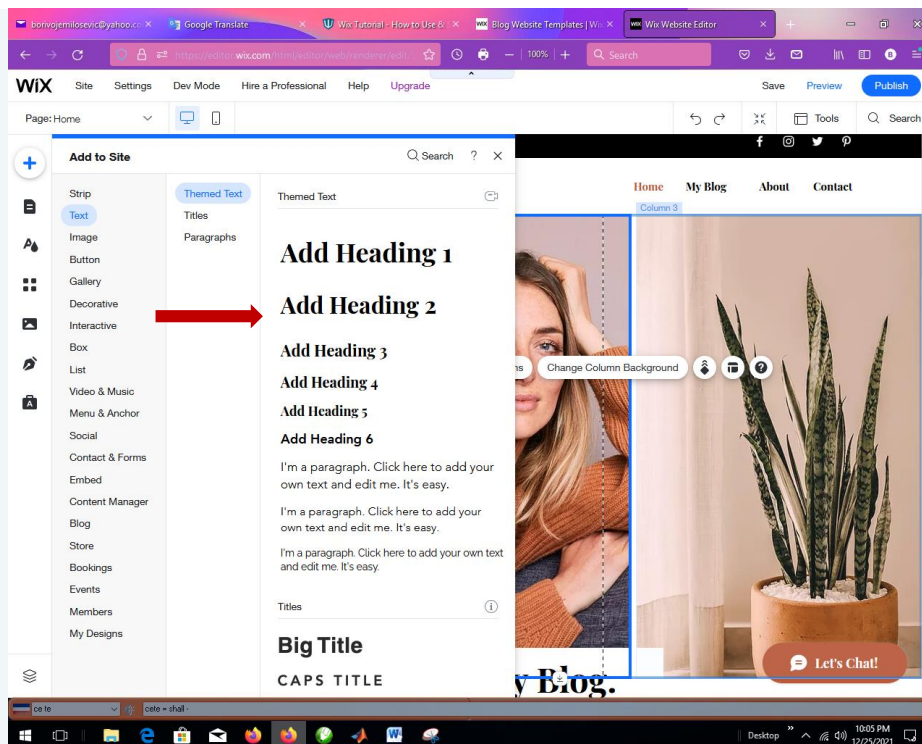


Označiti Heading 2 i prevući ga na mesto u prvoj slici onako kako mislimo da je potrebno. Zatim otkucati tekst za objašnjenje prve slike.

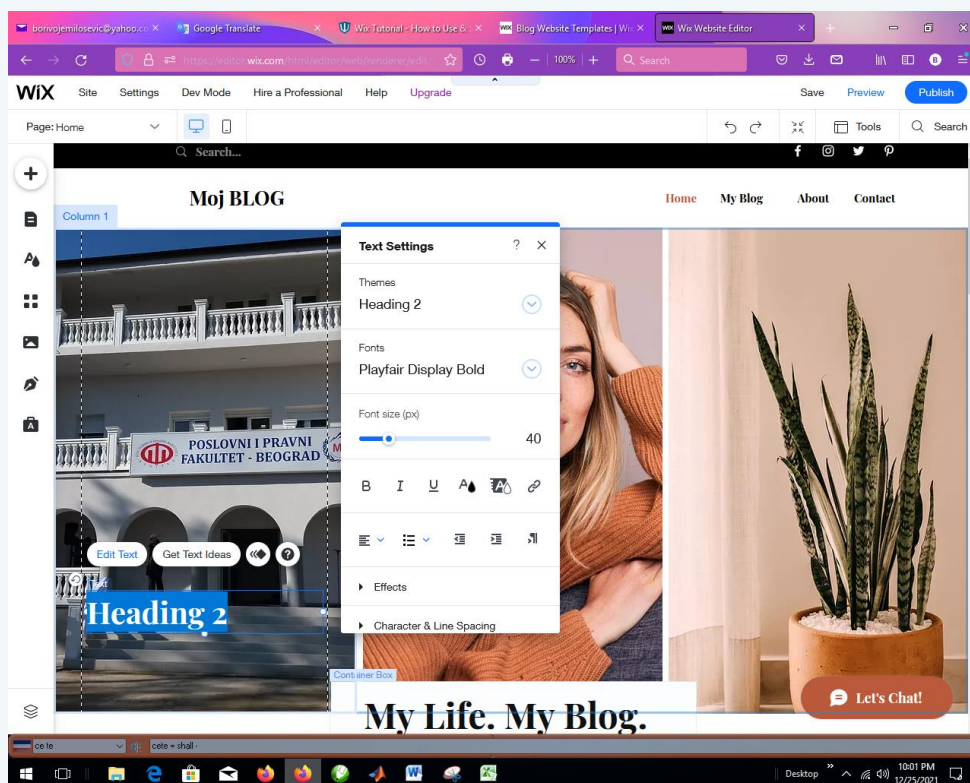

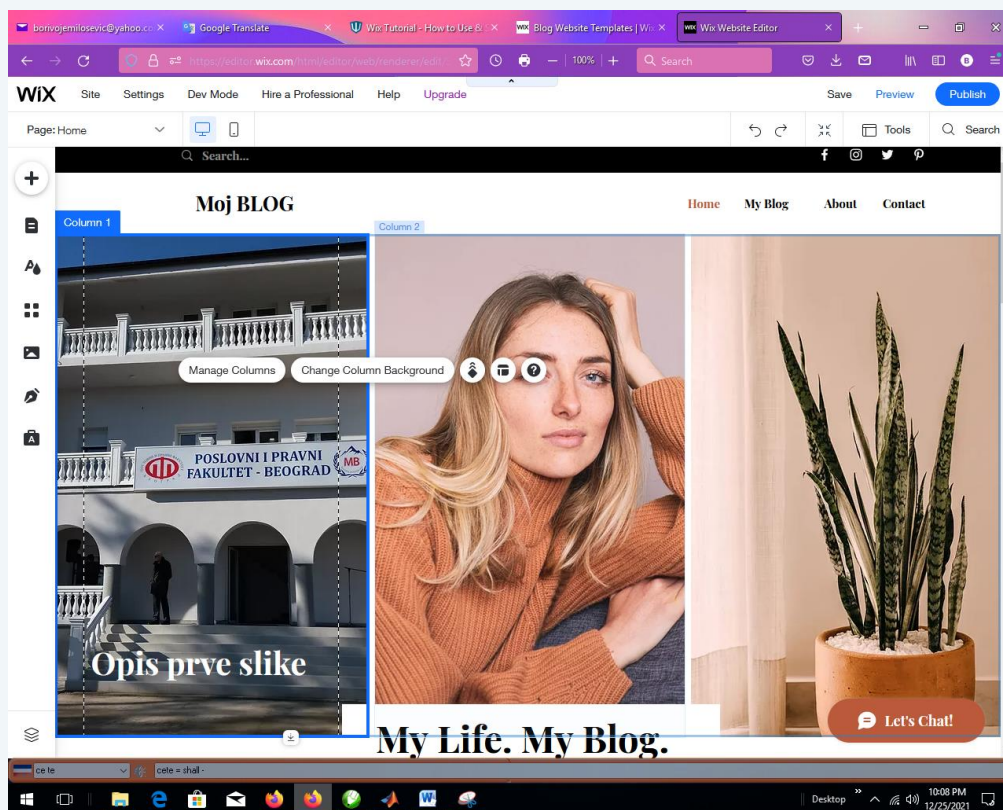



Isti postupak sprovesti sa drugom i trećom slikom.

Idemo sad na opciju My Blog iz glavnog menija:

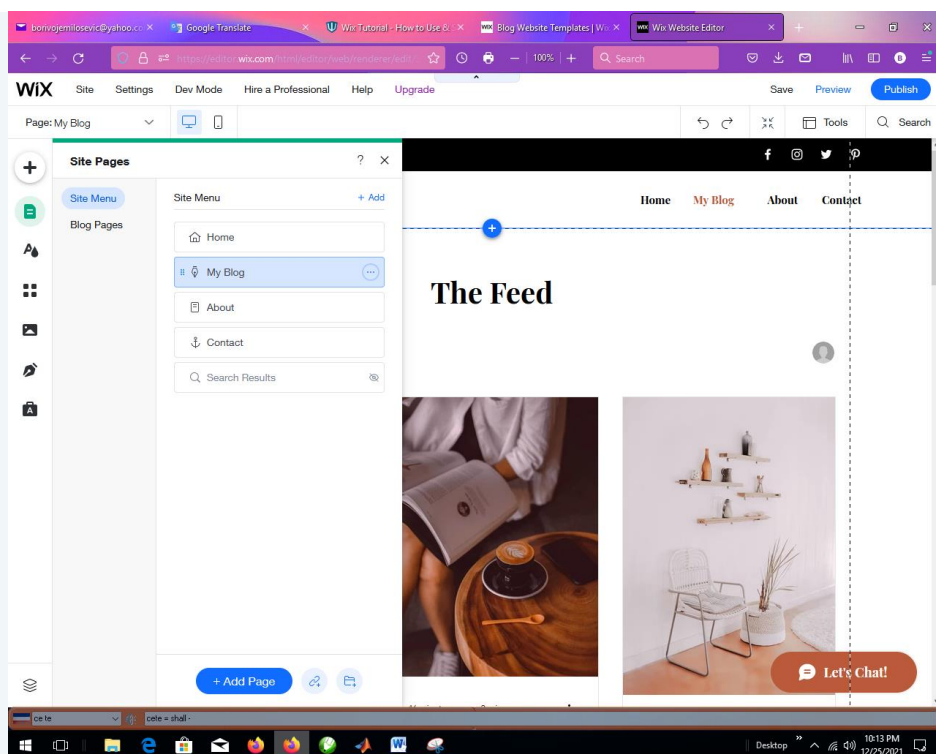


Ovde će se pojavljivati sajtovi koje predlažemo da se gledaju, za sada neka ostanu tako kako je. Idemo na About dugme iz menija:

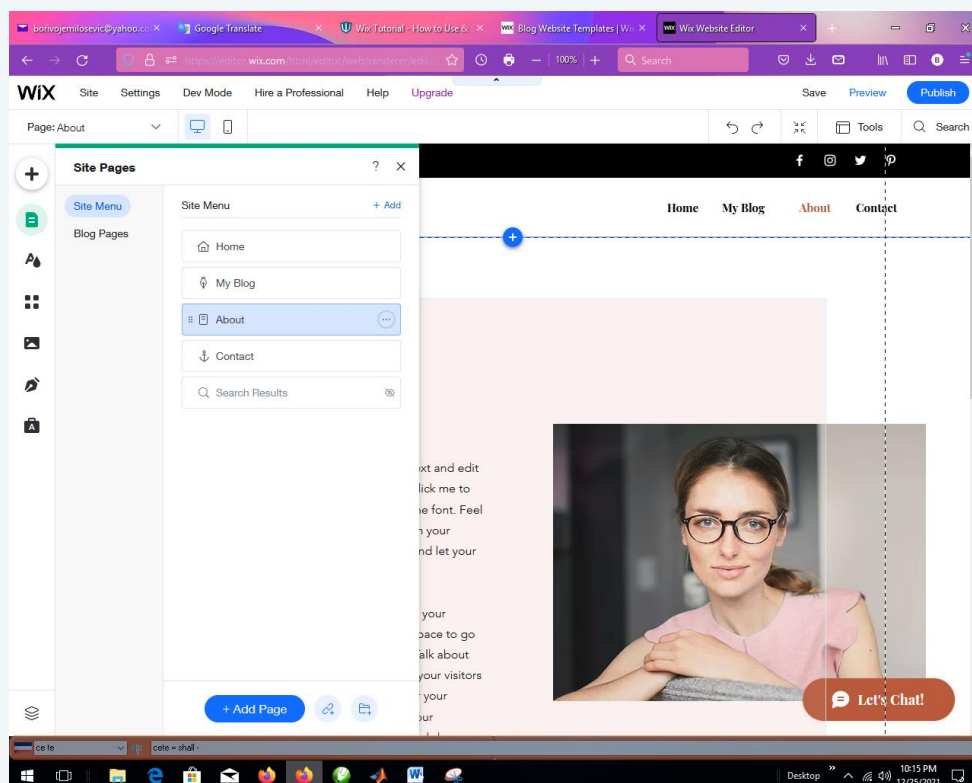


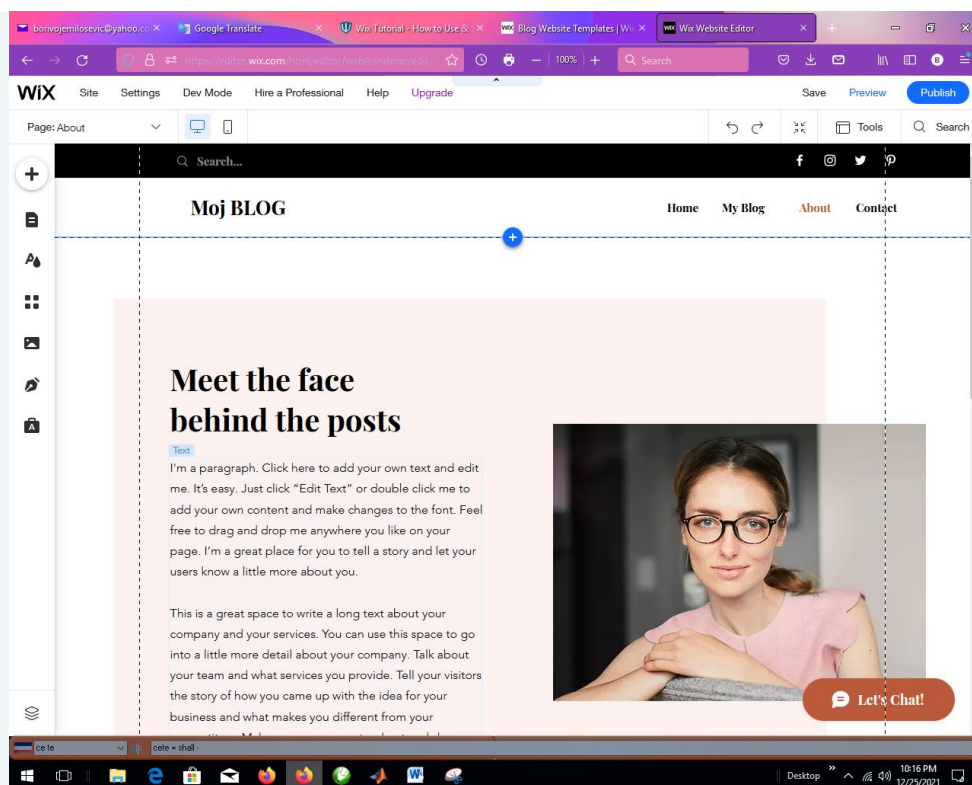


U ovu oblast možemo prevući tekst naprimer našeg CV.


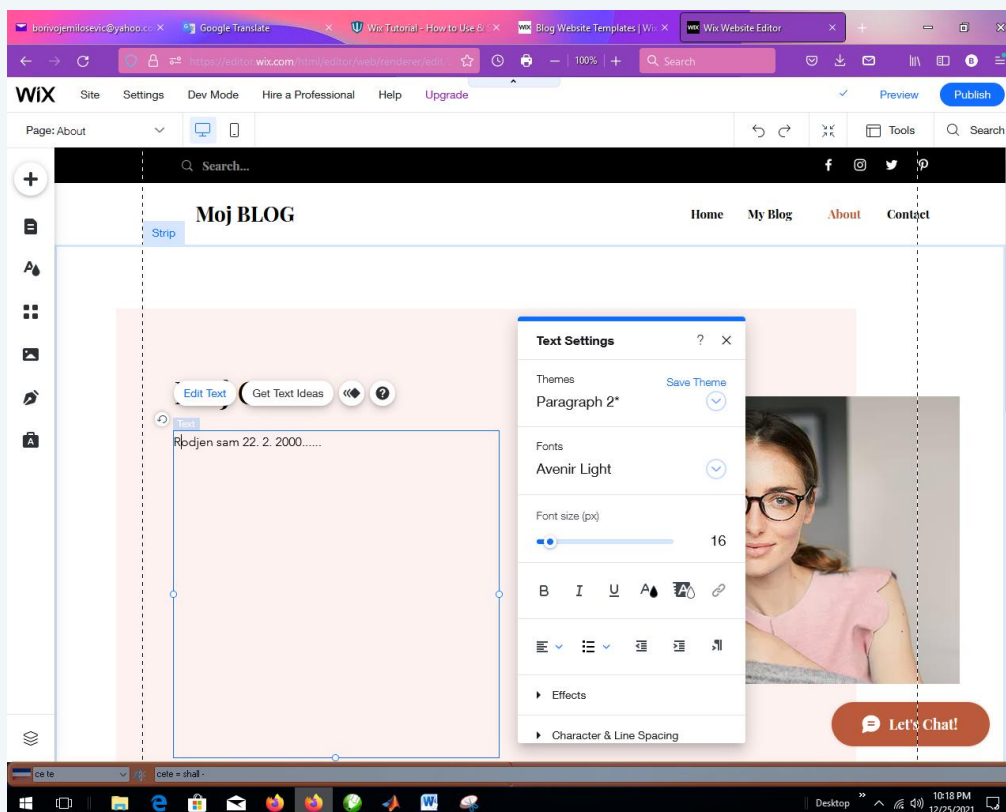


Kliknemo na sliku da bi je promenili:

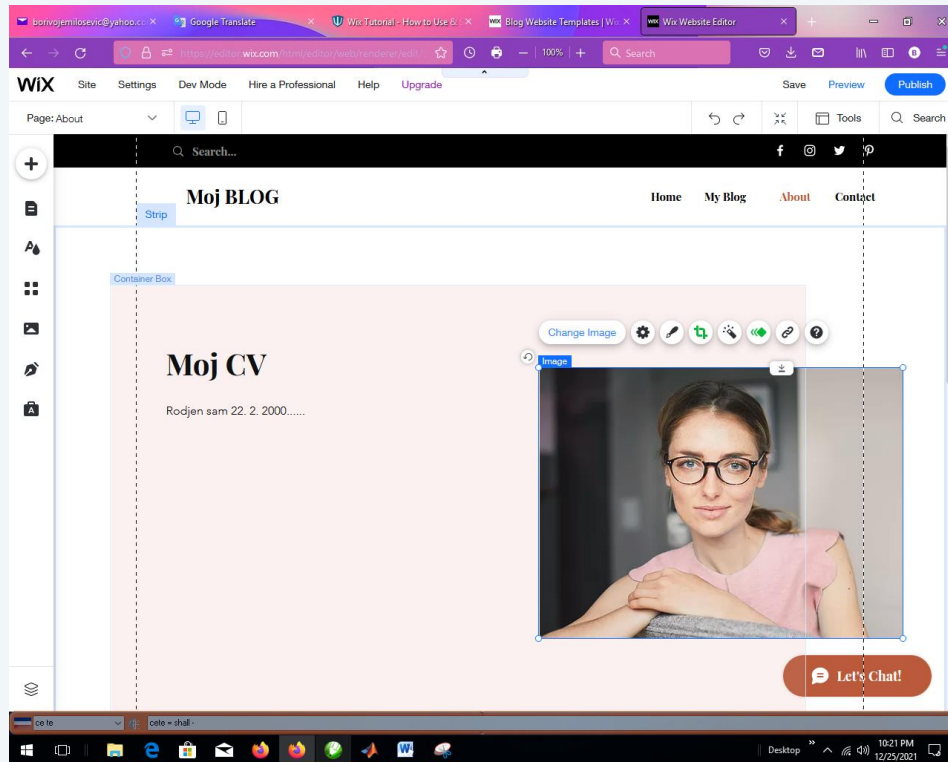


Kliknemo na sliku da bi je promenili opcijom Upload Media:

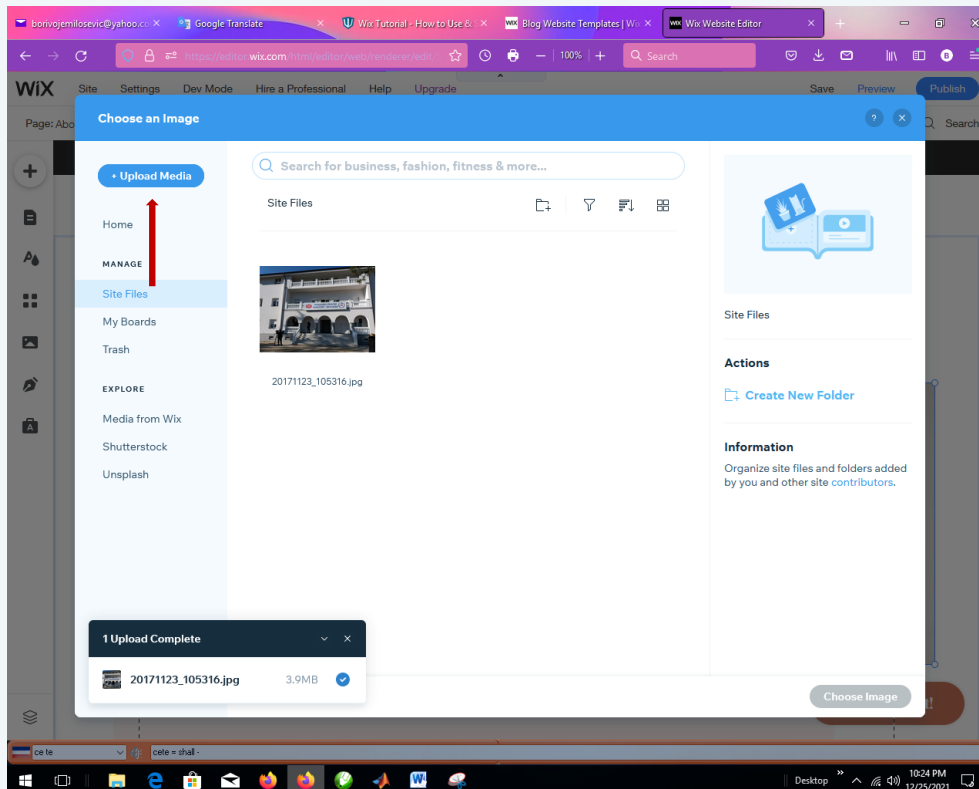


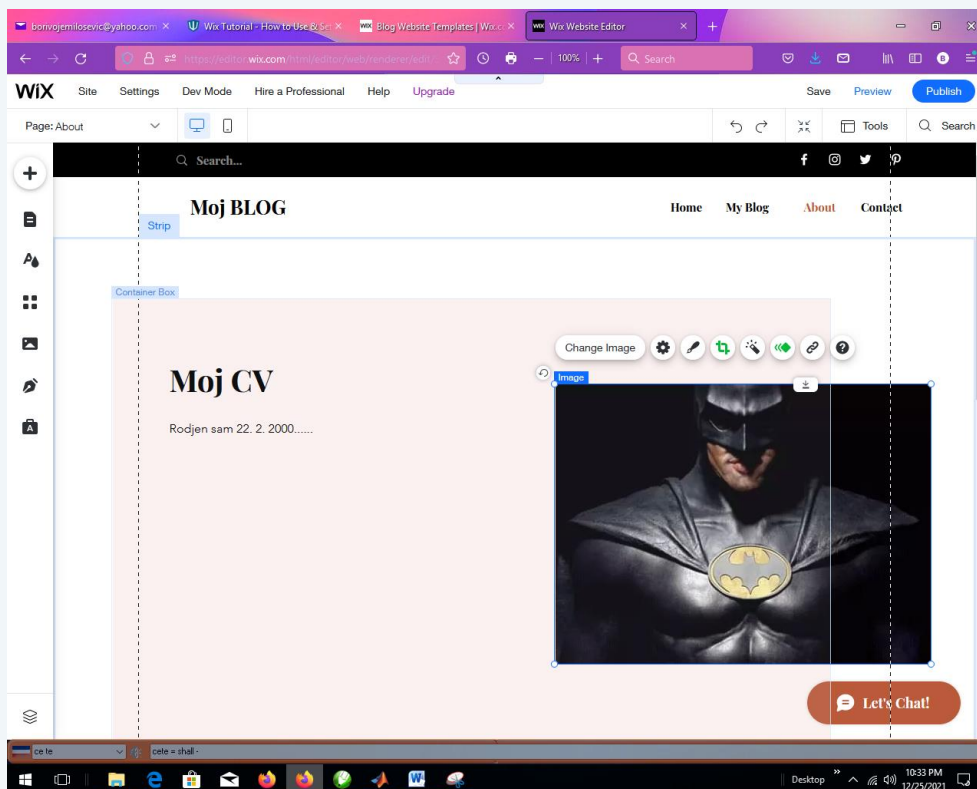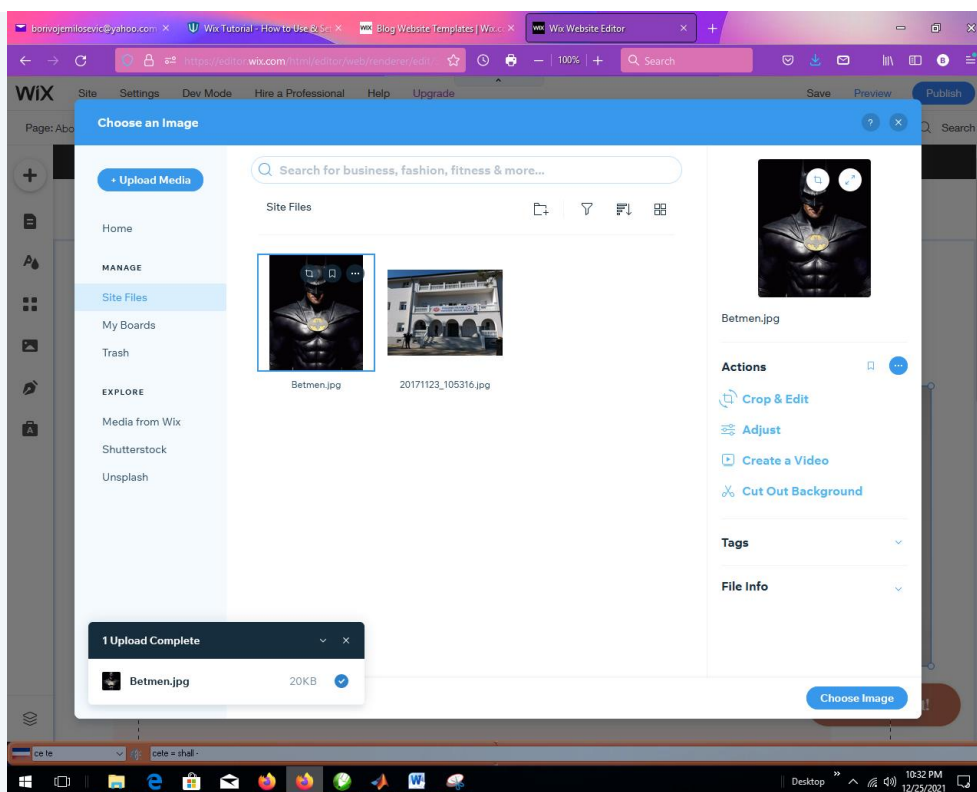



Idemo na opciju Contact gde korisnici mogu postavljati pitanja (ona ostaje kako je već dizajnirana):

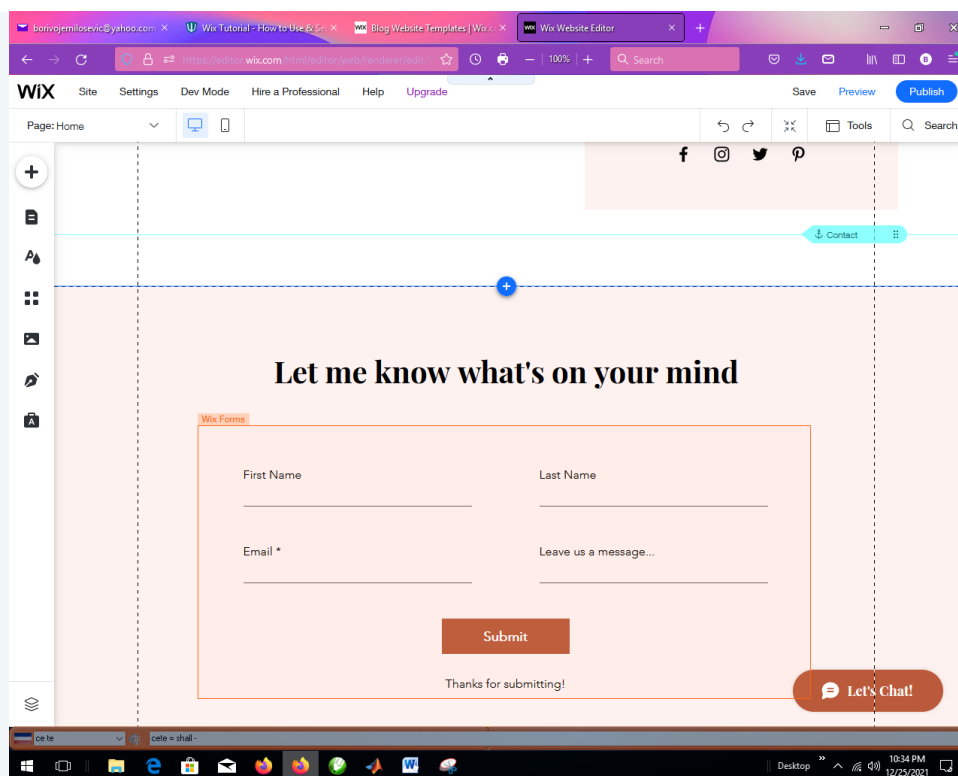


Vratićemo se na Home Page i izabiramo opciju Preview da bi proverili sadržaje glavnog menija i ostale opcije:

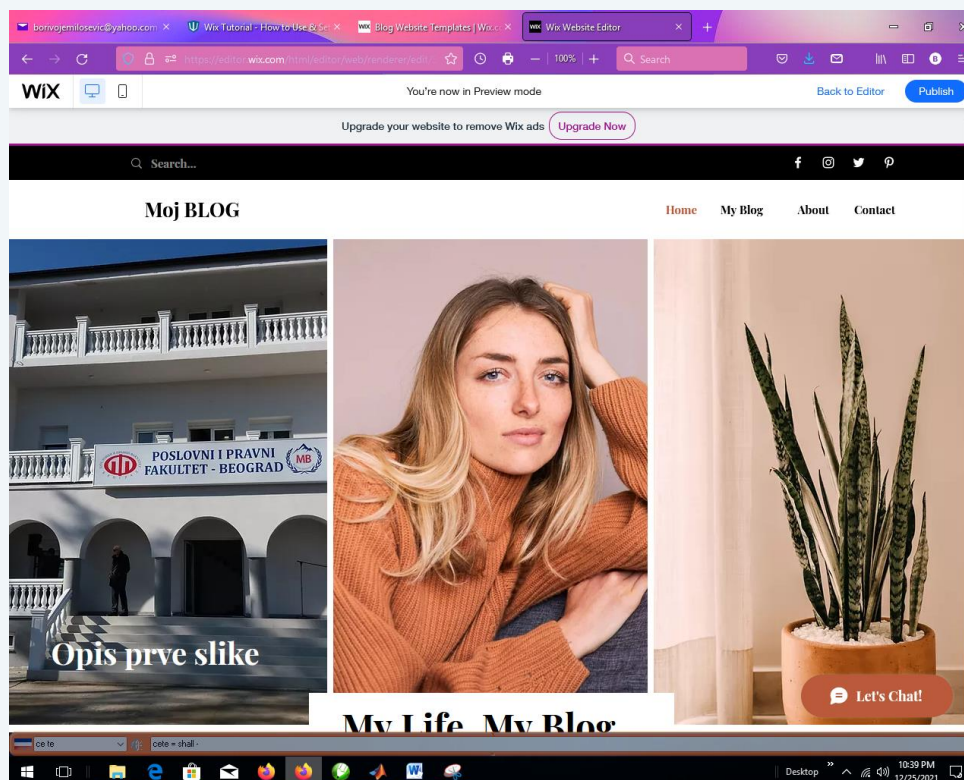




Sada podešavamo opciju za čatovanje i vraćamo se u Back to Editor:

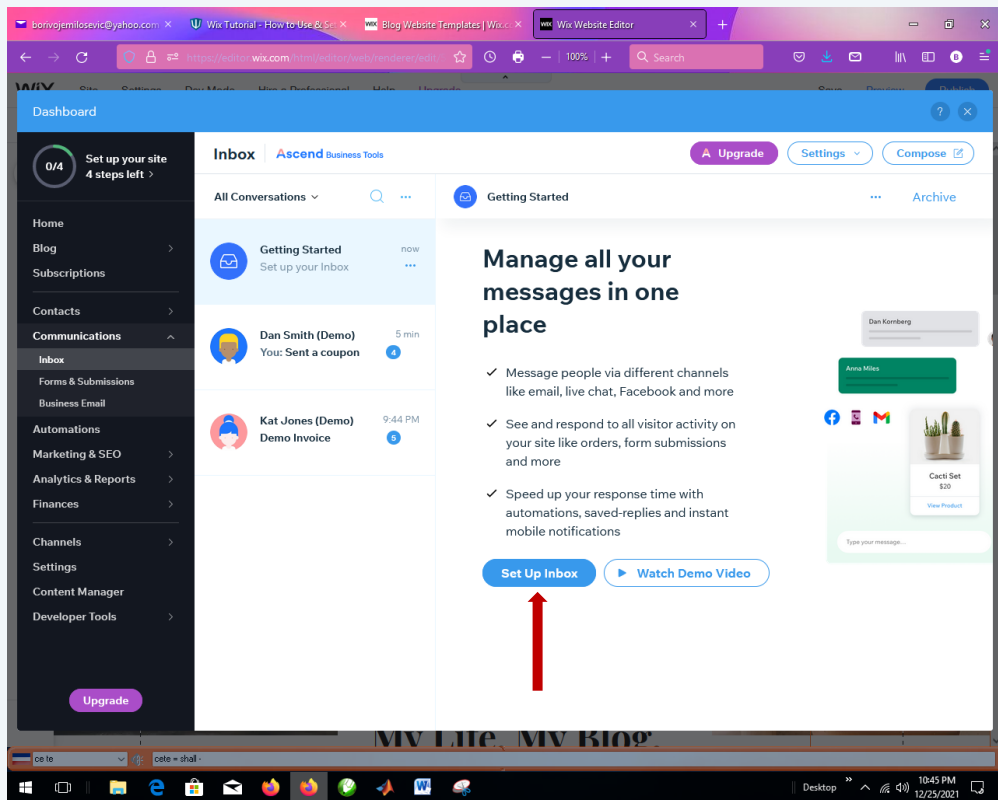
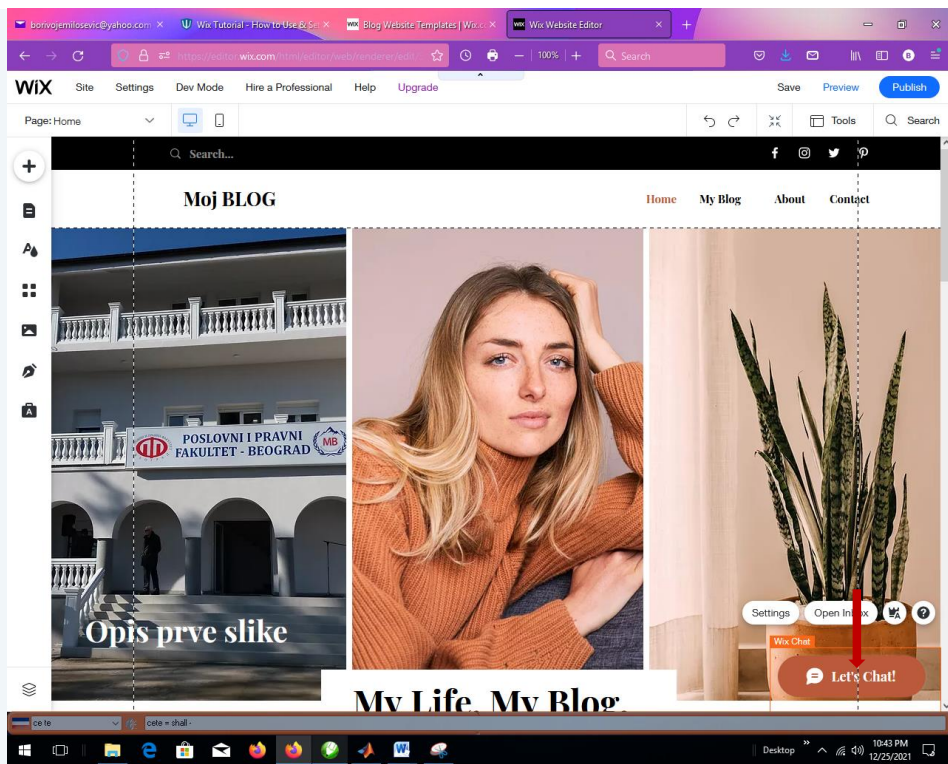


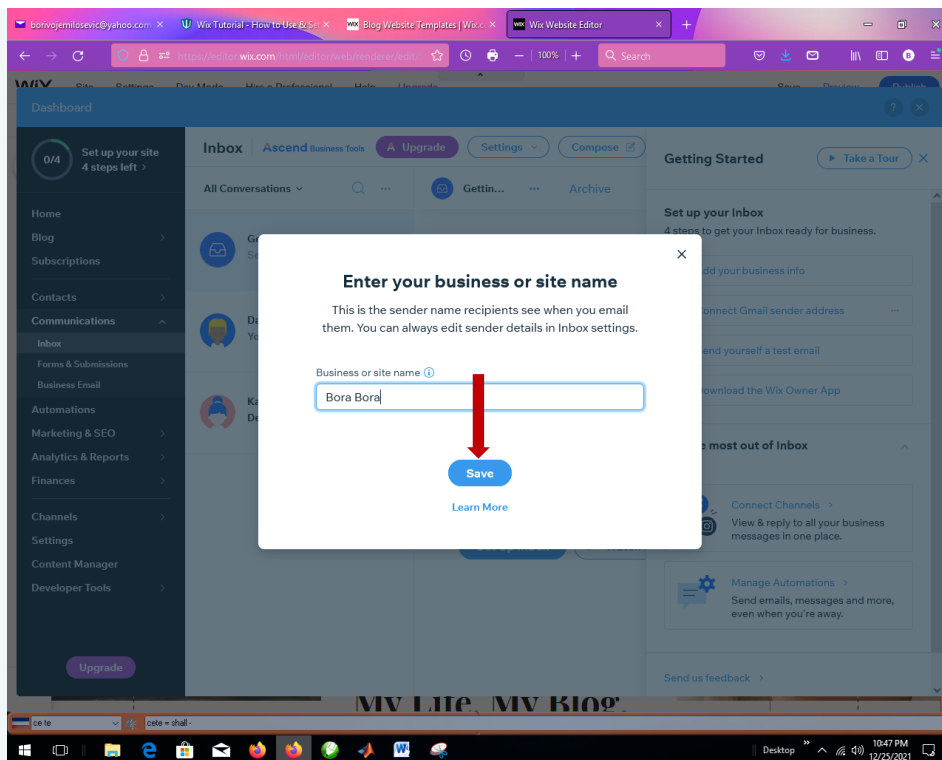


Sada morate odrediti nalog sa koga ćete slati i na koji ćete primati poruke:

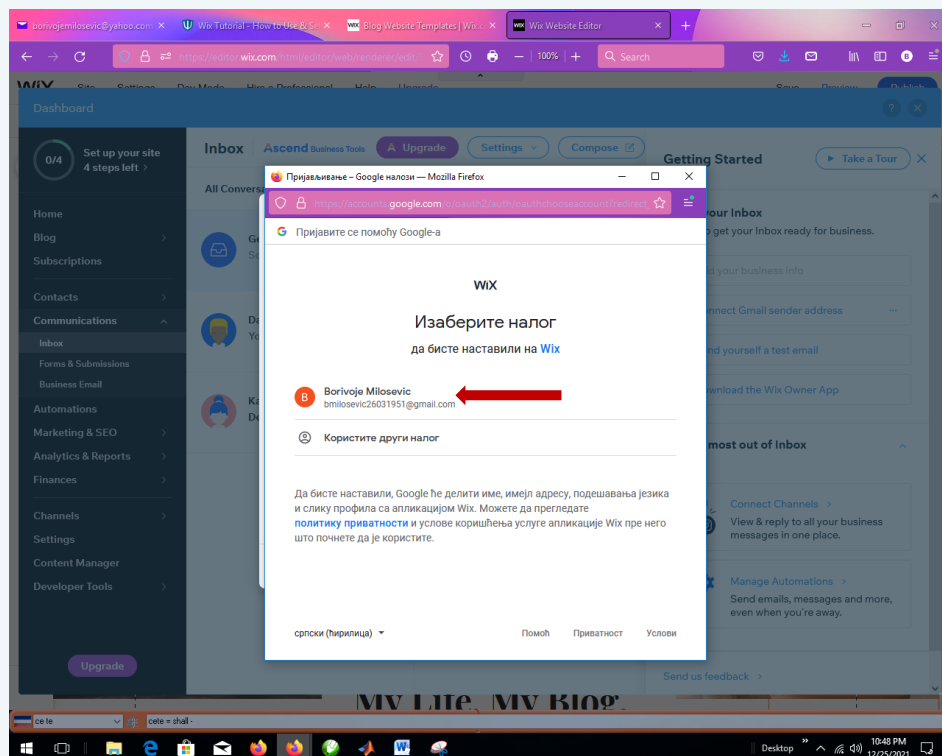

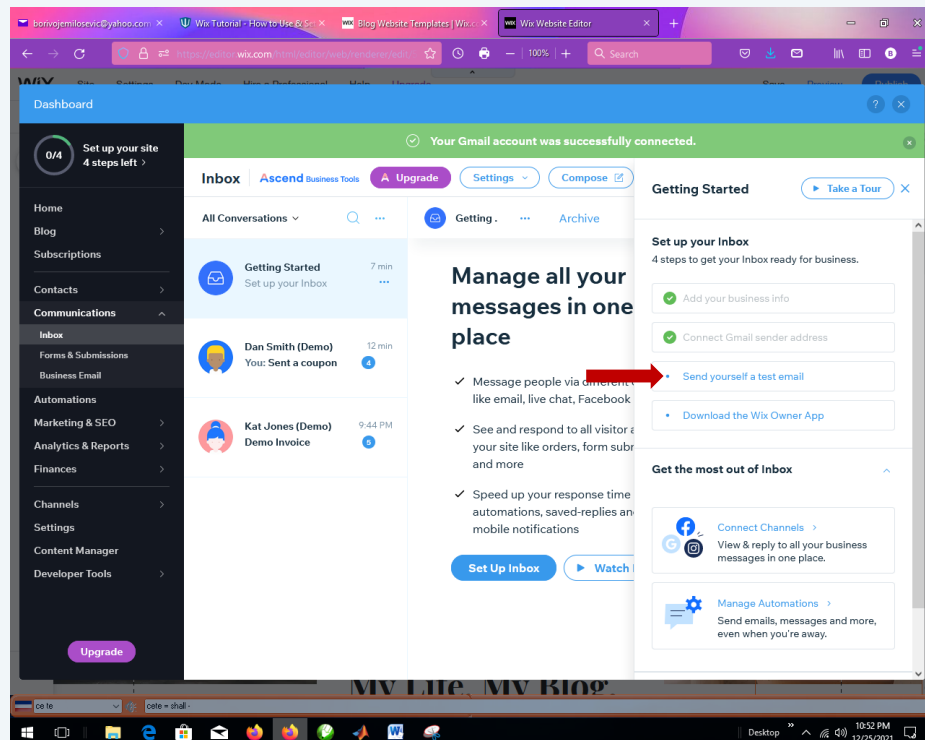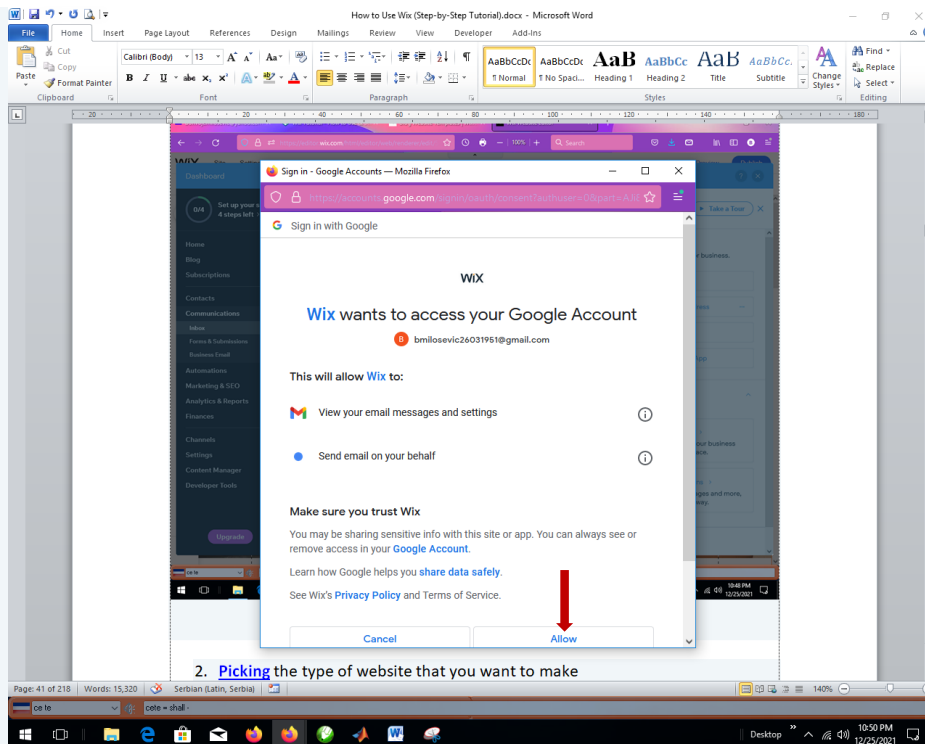

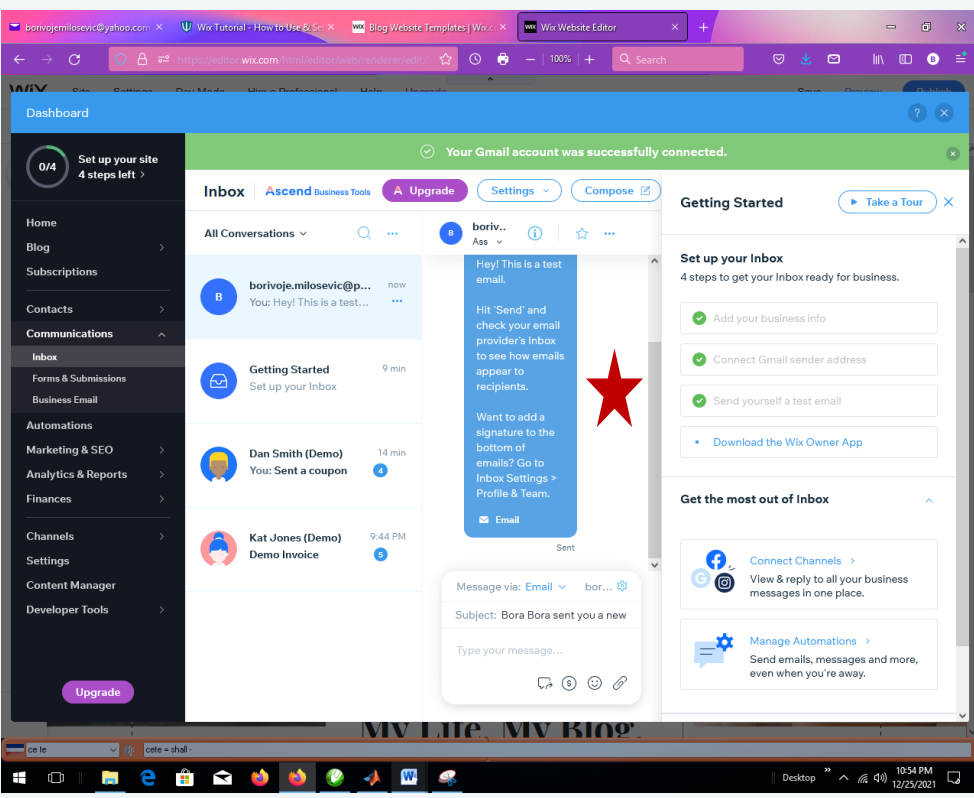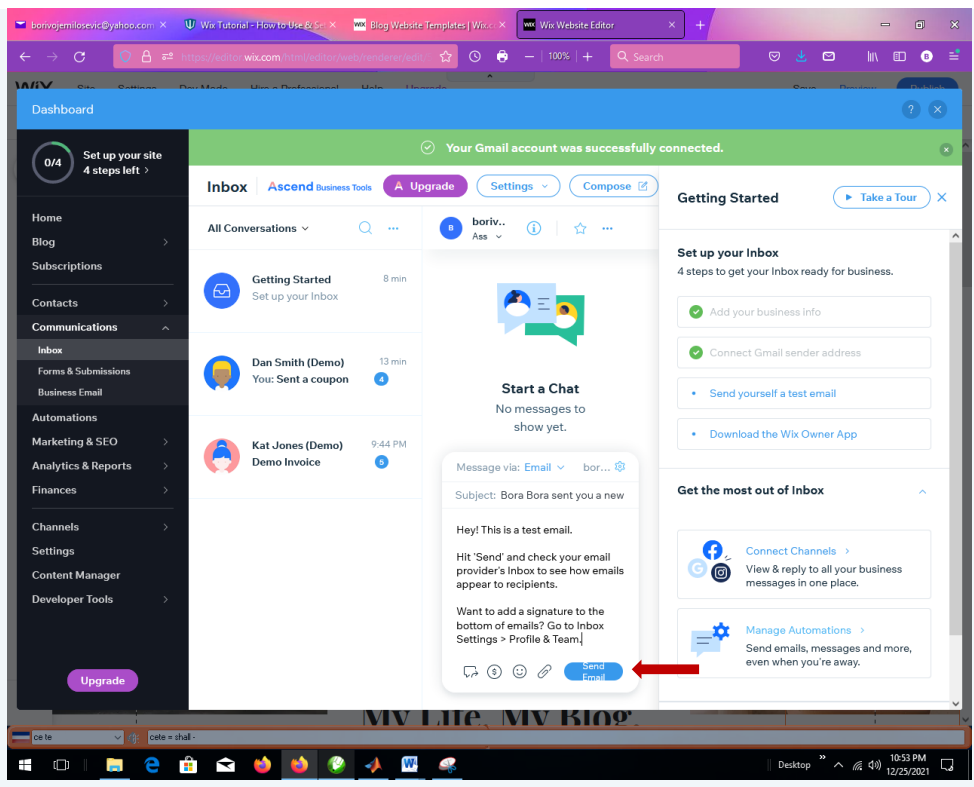

Zatvaramo Dashboard i prelazimo na Home page Preview:

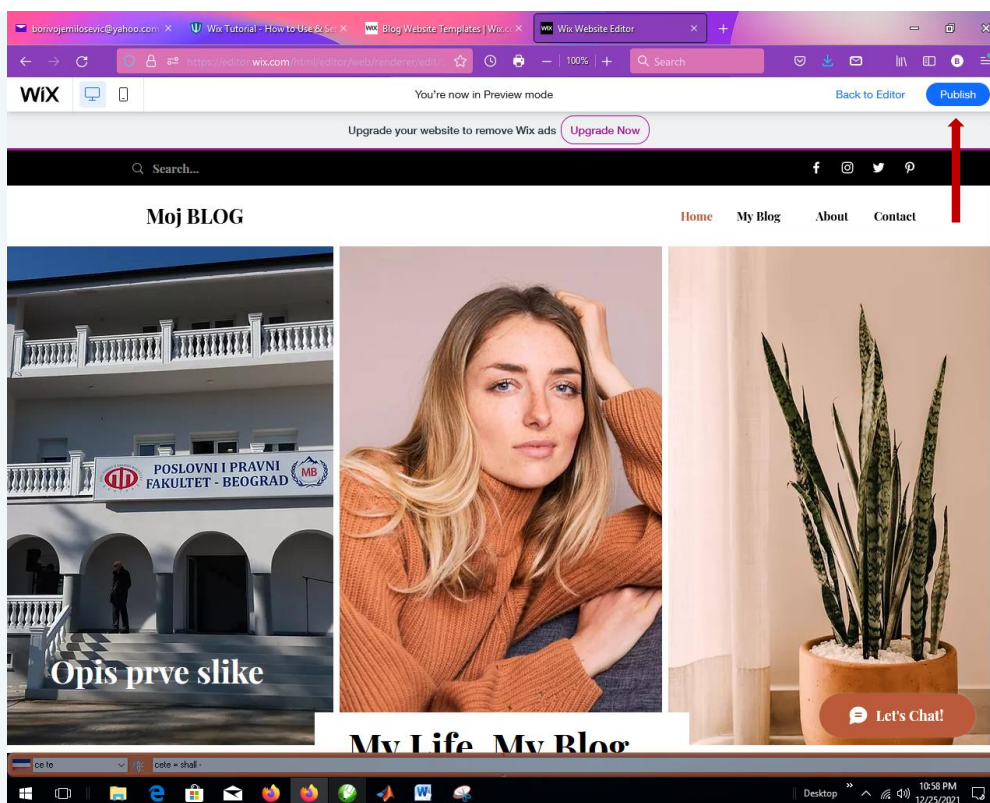

I na kraju možemo da publikujemo naš BLOG preko opcije Publish. Tada dobijamo link našeg bloga i možemo ga pokrenuti sa bilo kog brouzera.



Wix -Design

Možemo primeniti bogatu kolekciju besplatnih templejta, lepih vizualnih elemenata. Sve uglavnom sada zavisi od vase kreativnosti.

https://www.wix.com/features/design?utm_source=email_mkt&utm_campaign=em_blast_marketing_notification_design-features_25052020_mu_en&experiment_id=button_cta_1_resp

YOUR CREATIVITY • FUEL YOUR CREATIVITY • FUEL YOUR CREATIVITY • FUEL

WIX

Design. Done. Different.

Discover a rich collection of free design features, beautiful visual elements and innovative video technology exclusive to Wix. It's time to unleash your creativity.

Let's Do This

duration = trajanje; dužina života; vreme trajanja; postojanost; rok; isplate duga; dužina sviranja note; rok trajanja; dugotrajnost; trajnost; rok otplate

Desktop 6:28 PM 12/30/2021



Transparent Video: Bare It All

Add transparent videos made from the world's leading designers. With invisible backgrounds, you can place these videos anywhere on your website for a striking effect. Then customize its colors and how your visitors interact with them—on click, on hover or loop it.



[Add Transparent Video](#)

Wix.com Templates Wix.com

We Looked Everywhere For This Page! (Error 403)

But maybe we can still help you find what you're looking for:

- [Check out our stunning templates >](#)
- [Manage your website >](#)
- [Get in touch with our Support team >](#)

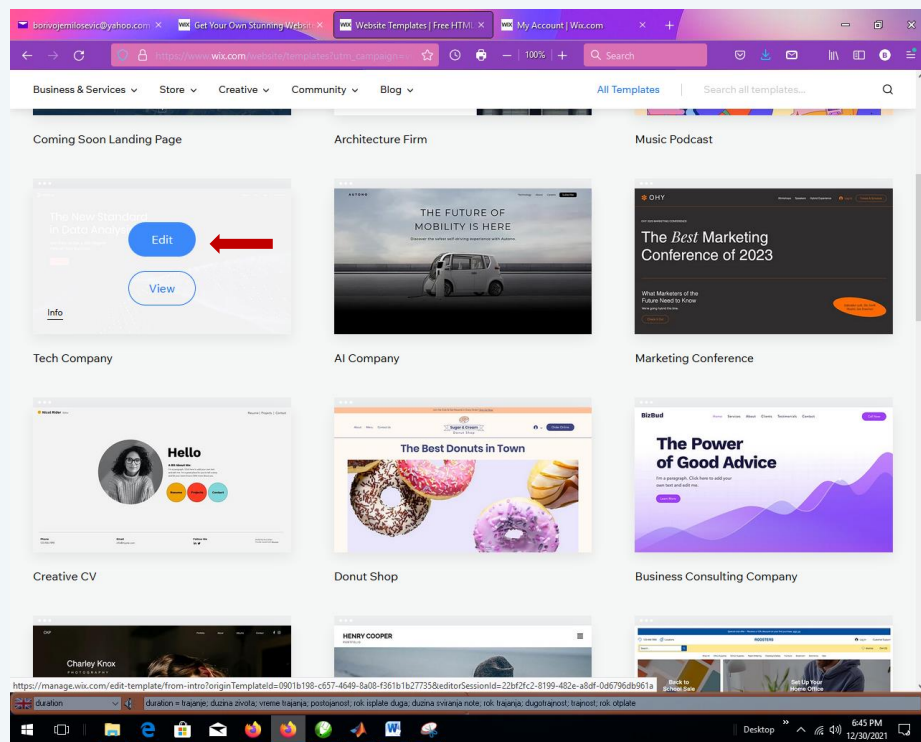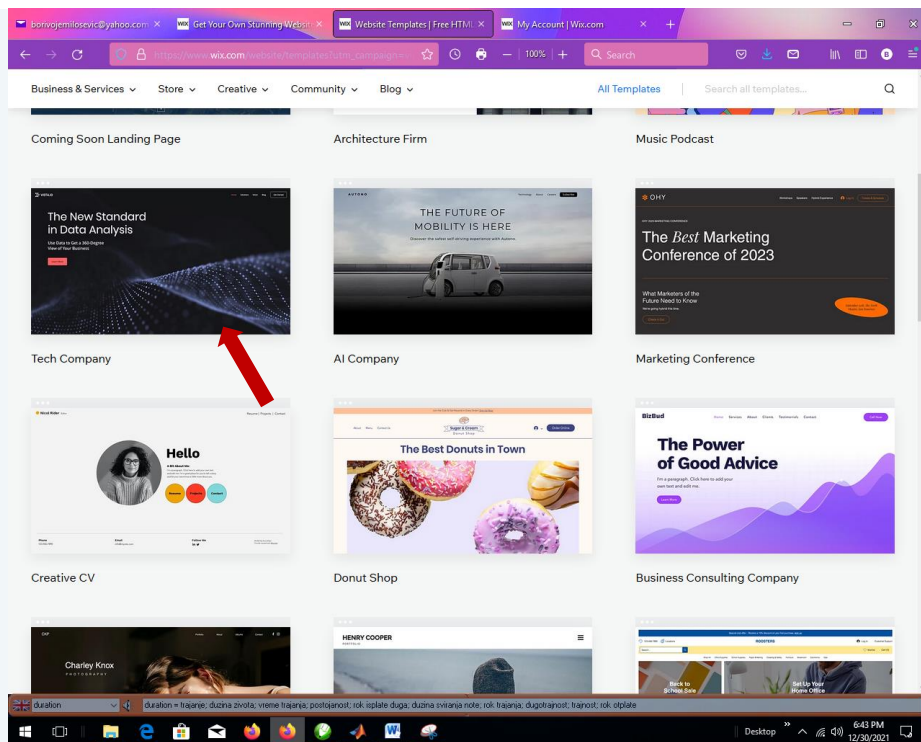



bonjomejosevic@yahoo.com x Get Your Own Stunning Website x Website Templates | Free HTML x Wix Website Editor x My Account | Wix.com x +

wix.com | 100% | Search

WIX Site Settings Dev Mode Hire a Professional Help Upgrade Save Preview Publish

Page: Home

+ BORA.IO Home Solutions Vision Blog Get Started

Novi standardi analize podataka

Korišćenje podataka u Biznis Inteligent sistemima

Learn More Change Strip Background

duration duration = trajanje; dužina života; vreme trajanja; postojanost; rok; isplate duga; dužina sviranja note; rok trajanja; dugotrajnost; trajnost; rok; otplate

Desktop 7:03 PM 12/30/2021